


Grass King®

Flail Mowers

# RULES THE ROADSIDE

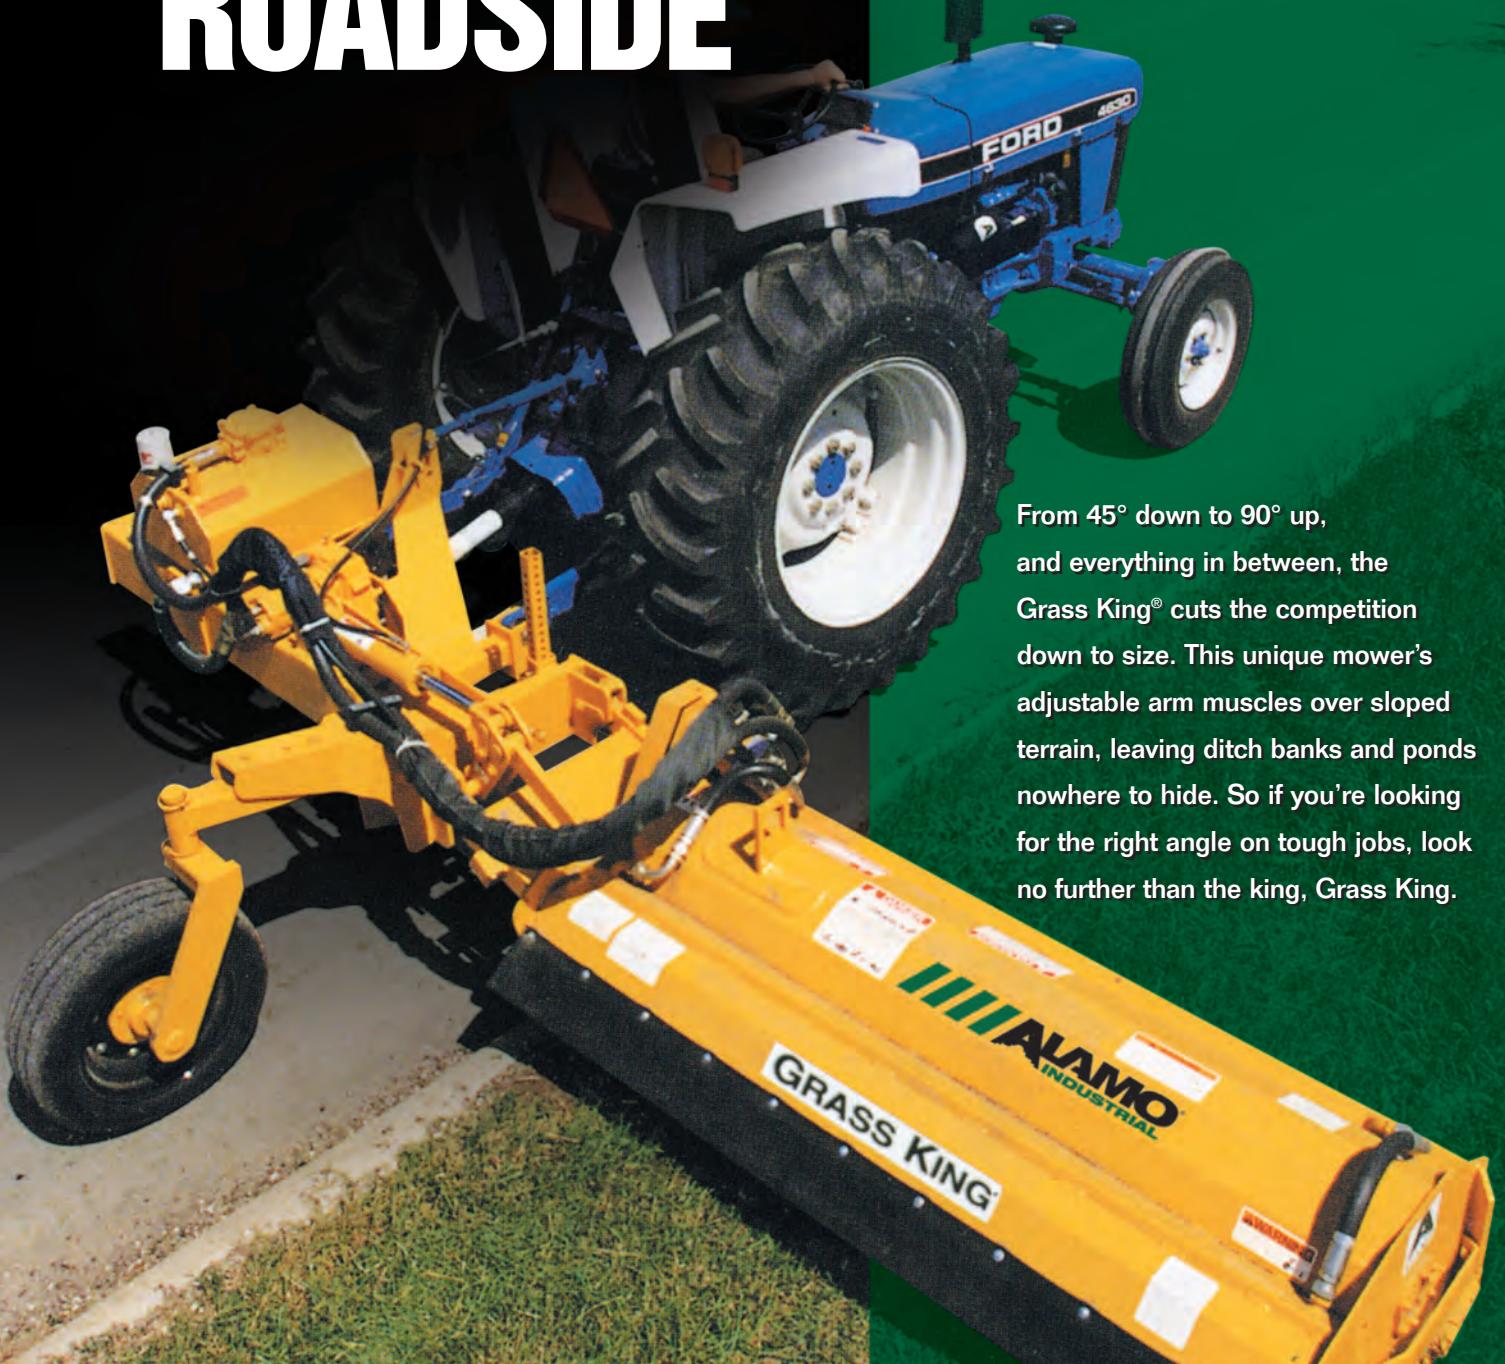

From 45° down to 90° up, and everything in between, the Grass King® cuts the competition down to size. This unique mower's adjustable arm muscles over sloped terrain, leaving ditch banks and ponds nowhere to hide. So if you're looking for the right angle on tough jobs, look no further than the king, Grass King.

Grass King®

The Alamo Industrial logo consists of five green diagonal bars followed by the word 'ALAMO' in a large, bold, black sans-serif font, with 'INDUSTRIAL' in a smaller, green sans-serif font below it.

BUILT SHARPER™

# Grass King®

Available in both 62" and 74" models, for over 20 years, the Grass King® has been mowing not only roadsides, but parks, school grounds, and golf courses where a neat, finished appearance is needed. The ability to choose the type of cutting knife allows you to tailor the mower to your specific cutting applications. Mow in hard to reach places such as over ditch banks and around ponds with more ease than ever before all with the convenience of having the versatility to use your tractor for other applications!

## Mounting

Convenient three point hitch mount with self-contained hydraulics offers the versatility you need in order to unmount quickly and use the tractor for other jobs.



## Support

A 20-ply full-swiveling tailwheel supports most of the approximately 1,800 lbs. of mower weight.



## Power

Power for the unit is supplied by the same piston pump and motor assembly proven on the Alamo Industrial (Mott) Interstater® flail mowing system. This system is capable of transmitting up to 70 HP at 540 PTO RPM, more than twice the cutting power of all known competitors.

This information is intended to be of a general nature only; specifications are subject to change without notice as we continue to improve our products.

© 2008 Alamo Group Inc. Alamo Industrial and Grass King are registered trademarks of Alamo Group Inc.



## Additional Specifications

### Cutting Widths:

62" and 74"

### Cutting Height:

Fully adjustable from 1/2" to 6" in 1/2" increments

### Cutting Housing:

10-Gauge Top and 5-16" End-Plates with Bearing Guards

### Skid Shoes:

Full length, Replaceable

### Cutter Shaft:

Dynamically Balanced - 4 1/2" Diameter, 3/8" Wall

**Warranty:** One year limited parts and labor. Non-governmental users are subject to modified policy. Only genuine Alamo Industrial parts should be used for warranty replacement.

### Cutter Shaft Bearings:

1 - 15/16" Bore greasable, sealed, self-aligning

### Rear Roller:

6" diameter, 1/4" wall, full-length tube rated at 6,000 lbs.

### Approximate Weight:

62" - 1720 lbs., 74" - 1870 lbs.

### Knife Pairs


62" - 36 Coarse Cut, 76 Fine Cut  
74" - 36 Coarse Cut, 92 Fine Cut

### Tractor HP Requirements:

Minimum 50-90 HP

### Size of Material Cut:

Up to 1" diameter grass and weeds



## Flexibility

A four-bar folding linkage allows the single hydraulic cylinder to position the mower from 45° down for ditch bank trimming to 90° up for transport down any standard roadside with ease.

## Adjustable

A full floating, adjustable CAT I or II hitch allows the unit to fit smaller tractors from 50-90 HP range. The adjustment permits the flail to be positioned to cut outside the rear tractor tire.

## Discharge Area

A full-width rubber deflector is mounted on the rear of the cutting head to aid in the even distribution of grass clippings. Also featured is a greasable 6" diameter roller bar with self-aligning bearings and end caps for added protection.



## Additional Options

- Cutting Knives
- Check Chains (Cat I or Cat II)
- Jack Assembly
- Special Mower Paint

# ALAMO<sup>®</sup>

BUILT SHARPER™

1502 East Walnut St. • Seguin, Texas 78155

1-800-882-5762

[www.alamo-industrial.com](http://www.alamo-industrial.com)