

# SNOWPLOWS & ACCESSORIES

[FISHERPLOWS.COM](http://FISHERPLOWS.COM)





**For more than  
70 years we've  
been building plows  
and spreaders for  
way-makers.**

FISHER® NATION doesn't stand to the side waiting for someone else to clear a path. You go where others haven't. And the way we see it, it's our job to keep making the equipment that works harder for longer—keeping you profitable and ahead of the rest.



## STANDARD FEATURES FOR ALL SNOWPLOWS



### MINUTE MOUNT® 2 SYSTEM

The FISHER® Minute Mount 2 system has been engineered for superior safety, durability and convenience. The mechanical nature of its design means that there are no sensitive electronics that could fail and prevent you from attaching or removing your plow.

The vehicle mounts and lower gear are built tough and flare both vertically and horizontally to help guide the plow into place during attachment.

Each vehicle mount kit has been engineered for an exact fit\* and is certified to meet all applicable Federal and Canadian Motor Vehicle Safety Standards.\*

Excludes HS plow and TRAILBLAZER™ UTV plows  
\*Except for the Universal Mount kit



### CHAIN-LIFT DESIGN

The FISHER chain-lift design offers a wide range of performance and reliability advantages over a direct-lift system, such as clean scraping, higher stacking and easy recovery in the rare event of a failure.

Excludes HT Series™ plow, HS plow and TRAILBLAZER UTV plows



### FLEET FLEX ELECTRICAL SYSTEM

Fisher Engineering dedicates countless hours researching and developing direct-fit electrical systems to ensure your vehicle and plow are safe, reliable and easy to operate.

The FLEET FLEX electrical system has been created to minimize the intrusion to your vehicle during installation and also provide simple, reliable connections between your vehicle and plow.

The additional benefit of the FLEET FLEX system is that it is completely universal to all current FISHER snowplows. This means that plow fleets are able to optimize their operations and use any plow on any vehicle.

Excludes HS plow and TRAILBLAZER UTV plows



### RELIABLE HYDRAULICS

We design and manufacture our own hydraulics to ensure the highest standards of performance, quality and reliability, giving you a plow that is fast, responsive and built to last. All critical hydraulic components are fully enclosed for protection from the elements.



### SECURITY GUARD™ ANTI-THEFT SYSTEM

This exclusive anti-theft system is a safe and secure way to electronically lock your snowplow whenever it is detached from your truck.

By creating a link between your snowplow and control, your plow will automatically unlock once it is connected to your vehicle. A backup code is also programmable to allow other vehicles authorized use.



### ISOLATION MODULE

An underhood module transfers lights from vehicle to plow automatically and improves system reliability by using plug 'n' play, sealed electrical connections that comply with OEM requirements. Isolating the plow's electrical system from the vehicle's prevents the potential of electrical system damage in the event of a shorted circuit.



### STORM GUARD™ BAKED-ON POWDER COAT

The industry's best protection against wear and rust, the STORM GUARD baked-on powder coat with epoxy primer is standard on all FISHER® snowplows.



### UNIVERSAL CONTROL OPTIONS

Choose between the ergonomic Fish-Stik® hand-held control or the dash-mounted joystick control. Both feature automatic shutoff, backlit buttons for night operation and LED lights which indicate "power" and "float" modes. Additional features include programmable "soft-stop," "one-touch" float, built-in SECURITY GUARD anti-theft system and a plug-in connector for easy removal.



### PREPUNCHED BLADES FOR ACCESSORIES

Plow blades are prepunched for easy installation of accessories, providing a custom fit. The prepunched holes also prevent damage to the powder coat that can sometimes occur when installing an accessory.

Excludes SD Series snowplow



### FISHER INTENSIFIRE™ HEADLAMPS

With FISHER truck plows, you have a choice between LED or dual-halogen headlamps. Dual-halogen headlamps provide a high-performing, economical solution, while the LED headlamps offer premium features and unprecedented performance. See pages 6-7 for more information.



## INTENSIFIRE™ LED HEADLAMPS

**INTENSIFIRE™ LED**

with **EdgeView™** TECHNOLOGY



# WINTER ISN'T AFRAID OF THE DARK. NEITHER ARE YOU.

**Winter doesn't sleep.** It's up at all hours of the night. And it knows you don't always see it coming. But that's about to change. The INTENSIFIRE™ LED headlamps are designed with premium features that provide unprecedented performance and superior visibility. Featuring exclusive EdgeView™ technology, the INTENSIFIRE LED headlamps provide operators with the safest all-around view of the plow's operating environment. When the headlamps are in low-beam mode, the LED lights provide a flat, even, ultra-wide, ultra-bright LED light pattern for superior visibility while also helping to reduce eye fatigue. When in high-beam mode, operators can see further down the road and experience a clearer view of upcoming hazards and the plowing environment. Clearly see the storm in front of you—all night long.

### Exclusive EdgeView Technology

The EdgeView technology design features a dedicated lens and LED bulb that directs light through the outer edge of each headlamp. This provides a full 180 degrees of light visibility, illuminating the plow from edge to edge, for the best all-around view of the plow's operating environment.

### 100% LED Performance

The FISHER® INTENSIFIRE LED headlamps offer 100% LED performance, which means every single bulb inside of the headlamps is an LED bulb. These LEDs provide up to two times the light output of halogens and have a much longer life expectancy for long-lasting performance.

### Solid Optics

Enhanced solid optic elements place light exactly where it needs to be, rather than relying on reflectors to aim the light as with many other halogen and LED lamps. This allows for optimized light projection which has been engineered specifically to improve poor visibility in inclement weather.

### Intuitive Heating System

Automatically senses temperature on the lens and activates heating elements when necessary to prevent snow and ice buildup, keeping the headlamps at full illumination and you plowing ahead.

### Advanced Lens Design


The forward-sloped lens is specially designed without a bezel to ensure it remains clean and free from ice buildup, and you can remain in the cab of your truck.

### Engineered and Tested for Durability

The INTENSIFIRE LED headlamps are designed with a robust, two-stud mounting bracket that helps hold the headlamps firmly in place. They are tested to withstand plowing in extreme temperatures, vibration, impact, water submersion, corrosion and shock.

### Upgrade Existing Truck Plows

The new INTENSIFIRE LED headlamps are available as an option to upgrade existing FISHER truck plows. To verify vehicle compatibility, be sure to check our online eMatch program for all of the most up-to-date vehicle applications.

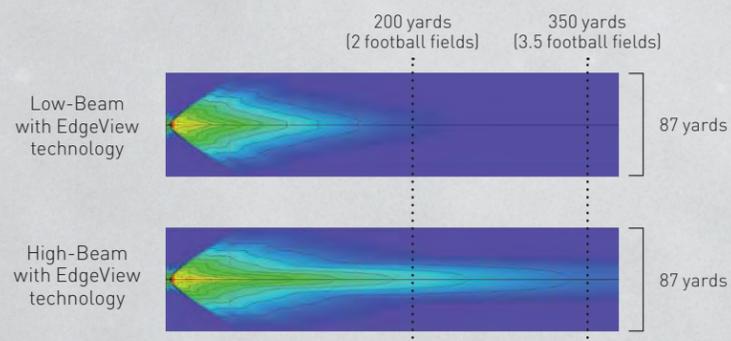

## INTENSIFIRE™ DUAL-HALOGEN HEADLAMPS

**INTENSIFIRE™**



# READY WHEN DARKNESS CALLS.

**While the rest of the world sleeps,** you and your FISHER® snowplow are out there working through the night to get the work done. The INTENSIFIRE™ dual-halogen headlamps gives you the ability to shed more light on any plowing job. With brighter performance and greater reach than traditional halogen headlamps, these dual-halogen headlamps are built to withstand even the most punishing conditions.

### Low and High Beam Performance

The low-beam pattern puts more light down immediately in front of the plow, helping to light up the operating environment when plowing.

The high-beam pattern throws light down the road, making it easier for late-night operators to see road hazards while traveling between jobs.

### State-of-the-Art Reflective Optics

INTENSIFIRE dual-halogen headlamps feature reflective optics that are engineered specifically for low-beam and high-beam modes. The dual-cavity design means each mode can provide the optimal light spread and throw, for a smooth, wide light beam pattern with minimal glare, no matter which mode you are in.

### Minimize Ice Buildup

Halogen headlamps are known for generating heat and can be very effective at minimizing the buildup of snow and ice on the lens.

### Lens Design

With the INTENSIFIRE dual-halogen headlamps, a contoured lens and housing helps prevent beading and sheds moisture that can be caused by thawed snow and ice.

### Engineered and Tested for Durability

The INTENSIFIRE dual-halogen headlamps are designed with a robust, two-stud mounting bracket that helps hold the headlamps firmly in place. They are tested to withstand plowing in extreme temperatures, vibration, impact, water submersion, corrosion and shock.

### Dual H9/H11 Halogen Bulbs

The bulbs have an average life of 1,500 hours and are easy to replace through a simple, three-screw, bulb-access cover.



# TOUGHER THAN WINTER.

When winter gets tough, get even tougher with the FISHER® XV2™ v-plow. Built to power through any storm, the FISHER XV2 v-plow comes equipped with extreme flared wings—up to 45°—and double-acting cylinders to easily handle anything thrown in its path. Plus, it's qualified for vehicles up to Class 6, so it's as versatile as it is hardworking.



Photo may be shown with optional accessories.



### Standard InstaLock Double-Acting Cylinders

InstaLock double-acting cylinders lock the wings together to use the v-plow in straight blade mode with single button control. Double-acting cylinders also hold the wings firmly in place for clean, efficient back dragging.

### Trip-Edge Design

The industry-leading FISHER® trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### Exclusive X-Bracing Design

Constructed from four vertical ribs and eight X-bracing ribs to reinforce the blade for structural integrity and torsional strength.

### T-Frame Design

Superior T-frame design provides optimum strength-to-weight ratio. The blade pitch adjustment feature allows for adjustment of the blade pitch for more even edge wear.

### Lift Ram

The XV2 plow's lift ram is 1 1/4" in diameter, providing more lifting power and durability while out on the job.

### Standard Cutting Edge

The standard 6" high-carbon steel cutting edge provides increased wear resistance and a clean scrape.

## MOLDBOARD AVAILABILITY

Stainless steel: 7'6", 8'6", 9'6" and 10'6" widths  
Powder coated steel: 8'6", 9'6" and 10'6" widths

See pages 4-5 for all standard snowplow features.

### Center Snow Control

For exceptional snow containment in all positions, the XV2 plow has a center deflector designed to prevent snow from going over the top of the blade, and the formed cutting edges reduce trailing snow.

### 70-Degree Attack Angle

The XV2 plow features an aggressive 70-degree attack angle for enhanced scraping and back dragging, making it ideal for asphalt or paved surfaces and for scraping up ice and hard-packed snow.

## 10'6" HEAVY-DUTY FEATURES

- **Blade Construction**  
Thicker moldboards and a more robust base angle with additional hinge points.
- **Heavy-Duty T-Frame**  
Features a solid, one-piece construction from front to back and an oscillating pivot bar.
- **Larger Angle Rams**  
Heavy-duty, 2" angle rams quickly move the snowplow in any direction.
- **Standard Blade Angle Stops**  
Made of reinforced 3/16" high-strength steel tube, the blade stops reduce stress and wear on the blade.
- **Standard Curb Guards**  
Constructed of abrasion-resistant material and designed to fit tight to the blade, the curb guards protect the outer edge of the plow from wear when plowing along sidewalks and curbs.

## ACCESSORIES

Poly Cutting Edge | Carbide Cutting Edge  
1/2" and 5/8" Steel Cutting Edges | Rubber Deflectors  
Wing Extensions | Back Drag Edge Kit\*  
Curb Wear Kits | Shoe Kits | Blade Stop Kit

Consult your local FISHER dealer or fisherplows.com for accessory compatibility and availability.

\*Not compatible with shoe kits and curb wear kits on v-plows

FISHER® FULL-LINE SNOWPLOWS + ACCESSORIES



# TAKE IT TO THE NEXT LEVEL.

With the ability to position the plow in V, straight or scoop mode, plowing snow with the XtremeV™ v-plow can take you to the next level. Whether busting through a long driveway or clearing a parking lot full of cars, the XtremeV v-plow makes quick work of brutal winter conditions.



Photo may be shown with optional accessories.



### Standard InstaLock Double-Acting Cylinders

InstaLock double-acting cylinders lock the wings together to use the v-plow in straight blade mode with single button control. Double-acting cylinders also hold the wings firmly in place for clean, efficient back dragging.

### Trip-Edge Design

The industry-leading FISHER® trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### Exclusive X-Bracing Design

Constructed from four vertical ribs and eight X-bracing ribs to reinforce the blade for structural integrity and torsional strength.

### MOLDBOARD AVAILABILITY

Stainless steel: 7'6", 8'6" and 9'6" widths  
Powder coated steel: 8'6" and 9'6" widths

### T-Frame Design

Superior T-frame design provides optimum strength-to-weight ratio. The blade-pitch adjustment feature allows for adjustment of the blade pitch for more even edge wear.

### Standard Cutting Edge

The standard 6" high-carbon steel cutting edge provides increased wear resistance and a clean scrape.

### 70-Degree Attack Angle

The XtremeV™ plow features an aggressive 70-degree attack angle for enhanced scraping and back dragging, making it ideal for asphalt or paved surfaces and for scraping up ice and hard-packed snow.

### Center Snow Control

For exceptional snow containment in all positions, the XtremeV v-plow has a center deflector designed to prevent snow from going over the top of the blade, and the formed cutting edges reduce trailing snow.

### ACCESSORIES

Poly Cutting Edge | Carbide Cutting Edge  
1/2" and 5/8" Steel Cutting Edges  
Back Drag Edge Kit\* | Rubber Deflector  
Wing Extensions | Shoe Kits  
Curb Wear Kit | Blade Stop Kit

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

See pages 4-5 for all standard snowplow features.

\*Not compatible with shoe kits and curb wear kits on v-plows



# INNOVATION KNOWS NO BOUNDARIES.

**When winter attacks, fight back in a big way.** The next generation of the XLS™\* expandable wing snowplows delivers a whole new level of versatility, efficiency and performance. The only expandable plow with independent wing control and trip-edge protection, the XLS plows come with flared wings and are available in two blade sizes: 8'-10' and 8'6"-11'. They are built bigger and stronger to carry more snow and accommodate larger trucks. Maximize handling and capacity with unmatched windrowing productivity so you can continue doing what you do, more efficiently and profitably.



Photo may be shown with optional accessories.

\*All product features and specifications listed in this brochure apply to XLS snowplows with serial numbers beginning with 180210 and higher.



### Trip-Edge Design

The XLS™ snowplow is the only expandable plow with a trip-edge. The FISHER® industry-leading trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### Standard Cutting Edges

The standard 6" high-carbon steel cutting edge provides increased wear resistance and a clean scrape. The XLS wings feature adjustable, poly wing cutting edges to provide added trip protection.

### Flared Wings for Efficiency

The XLS plows feature flared wings as tall as 36" to maximize snowplowing efficiency and aggressively cast snow further while windrowing. The wings can be controlled independently for scoop, straight and windrowing configurations.

### Structural Reinforcement

A structurally reinforced slide box constructed of 3/16" steel, 10 massive ribs and a heavy-duty torque tube provide rigidity and strength to the wings and the blade, eliminating buckling under heavy loads.

## MOLDBOARD AVAILABILITY

Powder coated or stainless steel:  
8' extends to 10' in straight and 8'10" in scoop  
8'6" extends to 11' in straight and 9'10" in scoop

See pages 4-5 for all standard snowplow features.

## FOUR PLOWS IN ONE




### Retracted Straight Blade

Perfect for transport and for narrow-access areas, such as drive-through lanes or tight windrowing areas.



### Expanded Straight Blade

Take wider passes in larger, wide-open spaces.



### Windrow Left / Right

For unmatched productivity, angle the leading wing and use the full blade with minimal spill off and reduce cleanup time.



### Scoop

Angle both wings forward to carry more snow around corners with minimal spill-off.

## ACCESSORIES

Rubber Deflector | Shoe Kits | 5/8" Steel Cutting Edge Carbide Cutting Edge | Back Drag Edge Kit\*

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

\*Not compatible with shoe kits on the XLS plow

FISHER® FULL-LINE SNOWPLOWS + ACCESSORIES



# PUT YOUR FLEET ON THE STREET.

**Make short work of big storms.** The 9' and 10' FISHER® HC heavy contractor snowplows are built for big trucks and designed to move large amounts of snow. So no matter what contractors or municipality plow drivers get thrown their way, they can move the snow, then move on to the next parking lot or street, time and time again.



Photo may be shown with optional accessories.



### Plow Blade Construction

The HC snowplow features a massive 34"-tall, 11-gauge, powder coated steel blade that is available in 9' and 10' widths. The aggressive attack angle and blade overhang promote a clean scrape and snow rolling.

### Structural Reinforcement

The HC snowplow features heavy-duty vertical ribs, gussets and pins, all reinforced by Fisher Engineering's proven T-frame design. This design is built strong to withstand even the heaviest snow for heavy-duty commercial and municipal vehicle applications.

### Standard Cutting Edge and Curb Guards

Both the 9' and 10' models come standard with abrasion-resistant curb guards and a 6" top-punched high-carbon steel cutting edge, which conforms to the standard highway punch bolt pattern, providing wear resistance and a clean scrape.

### MOLDBOARD AVAILABILITY

Powder coated steel: 9' and 10' widths

See pages 4-5 for all standard snowplow features.

### Oscillating A-Frame

With its oscillating A-frame, the HC snowplow pivots from side to side allowing the blade to follow the contours of the plowing surface for improved scraping and even cutting edge wear.

### Trip-Edge Design

The industry-leading FISHER® trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### Class 4 Through 6 Trucks

The HC snowplow was engineered specifically to optimize the capabilities of medium duty trucks.

### ACCESSORIES

Rubber Deflectors | SnoFoil® Steel Deflector Shoe Kits | 5/8" Steel Cutting Edge Carbide Cutting Edge | Blade Stop Kit

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.



# PERFECT FOR CONDITIONS THAT AREN'T.

**Streets, lots or driveways**—Mother Nature doesn't have a preference and neither does the FISHER® HDX™ stainless steel snowplow. Armed with an adjustable blade attack angle and an oscillating A-frame, the HDX snowplow is able to dial in and provide superior results regardless of the weather or the terrain. Clad with a clean stainless steel moldboard, this plow not only does the work better, it looks better, too.



Photo may be shown with optional accessories.



### Adjustable Attack Angle

Customize the blade's angle of attack to 55°, 65° or 75° to accommodate different plowing surfaces, weather conditions or operator preferences. Its boxed-in quadrant design features three attack-angle holes for easy adjustment.\*

### Oscillating A-Frame

With its oscillating A-frame, the HDX™ snowplow pivots from side to side allowing the blade to follow the contours of the plowing surface for improved scraping and even cutting edge wear.

### Structural Reinforcement

The HDX snowplow is constructed with a total of eight vertical ribs welded into a rigid framework. The two inner ribs and base angle have additional reinforcement, providing increased structural support when attacking winter's worst.

### MOLDBOARD AVAILABILITY

Stainless steel: 8' and 9' widths

See pages 4–5 for all standard snowplow features.

\*Attack angle adjustment may be limited on certain vehicles due to varying vehicle heights. Refer to your snowplow Owner's Manual or FISHER eMatch system for more details.

### Stainless Steel Moldboard

The 29"-tall moldboard is made of corrosion-resistant stainless steel for the ultimate in durability and performance.

### Trip-Edge Design

The industry-leading FISHER® trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### Standard Cutting Edge

The standard 6" high-carbon steel cutting edge provides increased wear resistance and a clean scrape.

### ACCESSORIES

Rubber Deflectors | Steel Deflector  
SnoFoil® Steel Deflector | Wing Extensions  
Carbide Cutting Edge | 5/8" Steel Cutting Edge  
Rubber Cutting Edge | Poly Cutting Edge  
Curb Wear Kits | Back Drag Edge Kit | Shoe Kit  
Heavy-Duty Lift Ram | Spring Adjustment Tool

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

FISHER® FULL-LINE SNOWPLOWS + ACCESSORIES

# HD<sub>2</sub>

# STRAIGHT AND TO THE POINT.

This blade comes in four different sizes, so no matter what you're driving there's an HD2™ snowplow that'll work for you. It's also strong—10 vertical ribs strong—which means even the toughest storms can't stop you. Combined with reliable and fast hydraulics, this plow moves a lot of snow and also raises the bar.



Photo may be shown with optional accessories.



### High-Strength Steel Moldboard

Rugged 29"-tall, powder coated, high-strength steel moldboard.

### Structural Reinforcement

The rugged HD2™ snowplow blade is reinforced with 10 vertical ribs welded into a rigid framework, providing additional structural support and torsional strength, even under heavy loads.

### Standard Cutting Edge

Each FISHER® HD2 snowplow comes standard with a 1/2" x 6" high-carbon steel cutting edge\* to provide increased wear resistance and a clean scrape.

### Trip-Edge Design

The industry-leading FISHER trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

## MOLDBOARD AVAILABILITY

Powder coated steel: 7'6", 8', 8'6" and 9' widths

## ACCESSORIES

Rubber Deflectors | Steel Deflector  
SnoFoil® Steel Deflector | Wing Extensions  
1/2" and 5/8" Steel Cutting Edges  
Carbide Cutting Edge | Rubber Cutting Edge  
Poly Cutting Edge | Curb Wear Kits  
Back Drag Edge Kit | Shoe Kit  
Heavy-Duty Lift Ram

See pages 4-5 for all standard snowplow features.

\*7'6" HD2 model comes standard with a 3/8" steel cutting edge

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

**SD SERIES**

# SHOW 'EM WHAT YOU'RE MADE OF.

Winter won't let up and with the help of the FISHER® SD Series snowplow, neither will you. The FISHER SD Series snowplows are rugged, hard-working plows built for lighter four-wheel-drive vehicles so you don't have to upgrade your truck to get a high-performance snowplowing machine.



Photo may be shown with optional accessories.



### Rugged Moldboard

The SD Series powder coated moldboard is 26" high and built with 14-gauge steel for a great balance of performance and versatility.

### Structural Reinforcement

The SD Series snowplow has eight vertical ribs and a torsion tube ensuring you have the durability you need when the going gets tough.

### Standard Poly Cutting Edge

The high-density poly cutting edge is designed to be light weight yet extremely durable, making it ideal for sensitive road surfaces such as pea stone and cobble stone.

### Attack Angle

The aggressive 75-degree attack angle provides enhanced scraping and back dragging, making it ideal for asphalt or paved surfaces, and for scraping up ice and hard-packed snow.

### Trip-Edge Design

The industry-leading FISHER® trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

## MOLDBOARD AVAILABILITY

Powder coated steel: 6'9" and 7'6" widths

## ACCESSORIES

Rubber Deflector | Steel Deflector  
3/8" Steel Cutting Edge | Curb Wear Kit

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

See pages 4-5 for all standard snowplow features.

FISHER® FULL-LINE SNOWPLOWS + ACCESSORIES



# ANY WORKLOAD. ANY TIME.

Built for half-ton trucks and ready for anything, the HT Series™ snowplow means business. Engineered with many of the features that make FISHER® snowplows the choice of the pros, you and your half-ton will be able to tackle any challenge and quickly move on to the next one.



Photo may be shown with optional accessories.



### Plow Blade Construction

Ideally suited for half-ton vehicles, the 7'6", powder coated, steel moldboard is 27" tall, offering you a full-size plow for personal use.

### Attack Angle

The aggressive 75-degree attack angle provides enhanced scraping and back dragging, making it ideal for asphalt or paved surfaces, and for scraping up ice and hard-packed snow.

### Scrape Lock

The Scrape Lock feature hydraulically locks the blade down for cleaner scraping and back dragging performance.

### Structural Reinforcement

Six vertical ribs and a full-length horizontal tube provide extra rigidity and strength to the core of the plow blade.

### Trip-Edge Design

The industry-leading FISHER® trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### MOLDBOARD AVAILABILITY

Powder coated steel: 7'6" width

### ACCESSORIES

Rubber Deflector | SnoFoil® Poly Deflector  
Carbide Cutting Edge | 3/8", 1/2" and 5/8" Steel  
Cutting Edges | Curb Wear Kits | Shoe Kit

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

See pages 4-5 for all standard snowplow features.

FISHER® FULL-LINE SNOWPLOWS + ACCESSORIES



# PLOW YOUR PROPERTY LIKE A PRO.

The FISHER® HS compact snowplow is a full-featured snowplow that's easy to attach and easy to operate, so you can clear your property how you want and when you want from the comfort of your own vehicle. Designed specifically for mid-size pickup trucks and SUVs, the FISHER HS compact plow will have you rigged and ready for whatever winter throws your way.



Photo may be shown with optional accessories.



### High-Strength Construction

The 23½"-tall, powder coated moldboard is built with high-strength, low-alloy steel that is stronger and lighter than conventional steel.

### Structural Reinforcement

Six vertical ribs deliver exceptional torsional strength, eliminating blade twisting.

### Formed Base Channel

A formed base channel provides extra support along the bottom of the plow blade.

### Full-Trip Moldboard

The HS compact snowplow features full-blade trip. This design incorporates two trip springs, allowing the blade to trip forward when encountering hidden obstacles, protecting your snowplow and vehicle from jarring damage.

### Ground Clearance

When the plow is not in use, quickly maximize vehicle ground clearance with the removable receiver brackets. No tools required.

### Standard Cutting Edge

The standard 5" high-carbon steel cutting edge provides increased wear resistance and a clean scrape.

### Easy On / Easy Off

Simple mechanical attaching system makes attaching and detaching your plow quick and easy.

### Scrape Lock

The Scrape Lock feature hydraulically locks the blade down for cleaner scraping and back dragging performance.

## MOLDBOARD AVAILABILITY

Powder coated steel: 6'8" and 7'2" widths

## ACCESSORIES

Rubber Deflector | Poly Cutting Edge  
3/8" Steel Cutting Edge | Curb Wear Kit  
Shoe Kit

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

See pages 4-5 for all standard snowplow features.

# DOUBLE DOWN.

Even the biggest storms are no match for the FISHER® STORM BOXX™ steel edge pusher plows. Designed with a steel trip-edge for clean scraping performance, they attach quickly and easily to skid-steers, backhoes, wheel loaders or tractors by using bolt-on, interchangeable attachment plates. Available in multiple sizes for multiple applications, these pushers were designed with one purpose in mind: to move massive amounts of snow, fast.

### Plow Blade Construction

The 8' and 10' STORM BOXX™ steel edge pusher plows come equipped with an enhanced, heavy-duty blade design. With 10-gauge steel moldboards for superior strength, the pusher plows measure 32 1/2" tall, and feature an optimized 63-degree angle of attack. The premium, high-gloss paint helps resist corrosion.

### Structural Support

The STORM BOXX steel edge pusher plows feature a structural steel channel that runs across the length of the entire blade and is internally lined with stiffener ribs to provide structural integrity and bucket-impact strength. Robust side support struts provide protection for the wings against bending from hitting curbs or other accidental impact.

### Steel Trip-Edge

The steel trip-edge design provides a cleaner scrape for hard-packed snow while protecting you and your equipment from hidden obstacles. The steel trip-edge is constructed with four extension springs and reinforced with two double ribs at the trip springs to handle large snow loads and stresses. The steel cutting edge is center punched, resulting in improved service life.



### Interchangeable Attachment Plates

Interchangeable, bolt-on attachment plates provide flexibility to attach a single pusher model to various types of equipment within a fleet: skid-steers, wheel loaders, backhoes and tractors.

## ACCESSORIES

Back Drag Edge | High Wear Shoe Kit | Chain Kit

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.



Skid-Steer  
Attachment Plates



Tractor  
Attachment Plates



Wheel Loader/  
Backhoe Attachment Plates

# GO BIG OR GO HOME.

For the really big storms, the FISHER® STORM BOXX™ rubber edge pusher plows are designed to move maximum snow in minimal time. These pusher plows are designed with a professional-duty, premium rubber cutting edge for unmatched durability on any road surface.

### Plow Blade Construction

The STORM BOXX rubber edge pusher plows are built for long life and trouble-free performance. Available in 12' for backhoes and 12', 14' and 16' for wheel loaders.

### Structural Support

A structural steel channel across the entire blade is internally lined with stiffener ribs for structural integrity and bucket-impact strength. Side-support posts provide protection against bending from curbs or other accidental impact.

### Quick-Change Attachment System

The quick-change attachment system features fully formed gussets that support both the upper and lower posts, which connect directly with the internal stiffener ribs for strength and support.

### Standard Cutting Edge and Shoes

The premium rubber cutting edge is adjustable and reversible to maximize use and abrasion-resistant, steel wear shoes on the sideplates enhance the life of the cutting edge.



### For Backhoes

Available in a 12' width, the STORM BOXX rubber edge pusher plow moves up to 11 cubic yards of snow.



### For Wheel Loaders

Available in 12', 14' and 16' widths, the STORM BOXX rubber edge pusher plow for wheel loaders moves up to 15, 18 and 21 cubic yards of snow.



# UPGRADE YOUR EARNING POTENTIAL.

Put your skid-steer to work with an XRS™, HDX™ or HD2™ snowplow. Built to handle the extra demands of skid-steer operation, the XRS, HDX and HD2 plows offer fast and easy hook up, adding versatility to your snow-clearing arsenal. Clear large parking lots, maneuver between cars and parking islands, and get the most out of your skid-steer this winter.



## XRS SKID-STEER PLOW

### For Maneuverability and Efficiency

Maneuver snow like never before with the responsive XRS skid-steer plow. Designed specifically for skid-steer applications, this rugged plow automatically retracts the inside wing when fully angled and then automatically returns to the scoop position once straight.

## HDX SKID-STEER PLOW

### For Maximum Durability

The stainless steel HDX skid-steer plow features an adjustable attack angle that lets you customize your setup for plowing surfaces, weather conditions and plowing preferences.

## HD2 SKID-STEER PLOW

### For the Best Value

The powder coated HD2 skid-steer plow stands up to the extra demands of skid-steer operation year after year.

## MOLDBOARD AVAILABILITY

**XRS:** Powder coated steel: 8'7" in scoop mode and 7'10" fully angled

**HDX:** Stainless steel: 8' and 9' widths

**HD2:** Powder coated steel: 7'6", 8', 8'6" and 9' widths

## Onboard Hydraulics

Skid-steer plows are quick to install and easy to operate. Leverage the skid-steer's onboard hydraulic system for powerful, efficient operation. Relief valves help protect the operator and the equipment when encountering hidden obstacles.

## Oscillating Skid-Steer Mount

The universal, oscillating, skid-steer mounting plate provides a number of application options. With six degrees of total side-to-side oscillation, the blade can easily follow the contours of the pavement for a cleaner scrape.

## ACCESSORIES

Rubber Deflectors | Shoe Kits | Hydraulic Coupler Kit

Consult your local FISHER® dealer or fisherplows.com for accessory compatibility and availability.

# REDEFINE UTILITY.

Get more use out of your utility vehicle with the FISHER® TRAILBLAZER™ line of UTV plows. These plows are engineered to fit a wide variety of UTVs and to handle the same demands as our commercial plows. Constructed from high-strength, low-alloy steel components, both models feature an easy-on/easy-off UTV mounting system and removable receiver brackets for exceptional ground clearance. TRAILBLAZER UTV plows feature Scrape Lock for clean scraping and back dragging.



## STRAIGHT BLADE

### Blade Construction

The 6'-wide, 14-gauge, powder coated steel moldboard features four vertical ribs for strength and durability.

### Standard Cutting Edge

The standard 5" high-carbon steel cutting edge provides increased wear resistance and a clean scrape.

### Full-Trip Moldboard

Two heavy-duty coil springs protect your plow and UTV by allowing the whole blade to trip when encountering hidden obstacles.

## ACCESSORIES

Rubber Deflectors | Poly Cutting Edges | Shoe Kits  
Light Bar Kit | Curb Wear Kit (straight blade only)  
Wing Extensions (v-plow only) | Blade Stop Kit (v-plow only)

Consult your local FISHER dealer or fisherplows.com for accessory compatibility and availability.



## V-PLOW BLADE

### Blade Construction

Featuring a 6'-wide, 14-gauge powder coated steel, flared moldboard, the TRAILBLAZER UTV v-plow easily adapts to handle 5' sidewalks and gates in angle, scoop or V mode.

### Standard Cutting Edge

The standard 5" high-carbon steel cutting edge provides increased wear resistance and a clean scrape.

### Structural Reinforcement

The TRAILBLAZER v-plow blade is reinforced with six vertical ribs and features the strength of our proven T-frame design.

### Trip-Edge Design

The industry-leading FISHER trip-edge design protects you and your equipment. Only the bottom edge trips, so the blade stays upright and plowed snow stays in front of the blade. Compression-type springs never need to be adjusted or wear out.

### Standard InstaLock Double-Acting Cylinders

InstaLock double-acting cylinders lock the wings together to use the v-plow in straight blade mode with single button control. Double-acting cylinders also hold the wings firmly in place for clean, efficient back dragging.

# RB-400 ROTARY BROOM

## THE NEXT STEP IN SIDEWALKS.

The FISHER® RB-400 walk-behind rotary broom helps get walkways cleaner by scraping and sweeping snow all the way down to the surface. It's also perfect for areas that are tight up to buildings, curbs or edging. Whether it's just a light dusting, heavy wet snow or compacted snow that was walked on or driven on before you got to the job, the walk-behind rotary broom will take care of the situation quickly and leave you with a clean that is unmatched.



### Standard Features

- Adjustable broom-rotation speed and adjustable down-pressure allow you to adapt to any condition.
- Floating, pivoting broom head gives you five angle settings to adjust the trajectory of the snow.
- Quick-attach plow blade features wheels and floating design to move heavy or deep snow.
- Seven-position handlebar height adjustment for operator comfort.
- The three-speed gear box provides the ideal operating speed, and the powered reverse function improves maneuverability and reduces operator fatigue.
- Active-assist steering and freewheel design allow for 360-degree turning.
- Unique brush-head design features angled outer bristles to clean up-close to buildings, curbs and edging.

### ACCESSORIES

Debris Collector | Multi-Purpose Bristles

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

# PUSHER SHOVEL

## PUSH THROUGH WINTER.

Constructed from rugged polyethylene with a reinforced bracket and handle, these lightweight pusher shovels are built to stand up against the worst of winter—month after month, year after year.



### Standard Features

- Available in 30" and 36" blade widths.
- Blade is constructed from ultra-high molecular weight polyethylene for superior strength and wear resistance.
- D-shaped nylon handle improves operator grip when shoveling, season after season.
- A fiberglass pole is securely fastened to the blade with a reinforced triangular base and heavy-duty support bracket for added strength against heavy snow.



# OFFICIAL GENUINE FACTORY-TOUGH.



FISHER® Genuine Factory-Tough accessories are manufactured with the FISHER quality you've come to expect. They're designed to enhance your plow's performance and longevity while also allowing you to customize your plow to meet the specific demands of each unique application.

### SNOWPLOW MAINTENANCE



#### Emergency Parts Kit – Minute Mount® 2

Be prepared! This emergency parts kit is designed specifically for the new FLEET FLEX system snowplows. All kits contain high-volume FISHER Genuine Factory-Tough service parts needed for most emergency repairs.



#### Hydraulic Fluid

FISHER EZ Flow high-performance hydraulic fluid is specifically formulated to provide better viscosity in all temperatures for optimal performance in severe conditions. Available in 1-quart, 1-gallon and 55-gallon sizes.



#### FISHER Factory Original Paint

Genuine Factory-Tough paint in black, silver, and FISHER yellow provides durable coverage and is mixed to match your original equipment. Available in spray cans, quarts or gallons.



#### FREEZE GUARD™ Grease

Available in 14 oz, 7 lb, 120 lb, and 400 lb sizes, FISHER FREEZE GUARD Grease defends and protects plow and spreader bearings, pivot points and moving components from wear and corrosion, even in extreme cold.

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

## SNOWPLOW ACCESSORIES



### Cutting Edges

Increase wear resistance and restore your worn base angle to the proper geometry. Steel, rubber, poly and carbide options available depending on plow model.



### Rubber Deflectors – 10" and 18"

Made from 2-ply, heavy-duty rubber, these easy-to-install rubber deflectors provide improved visibility by deflecting snow forward instead of onto your windshield.



### SnoFoil® Steel and Poly Deflectors

The curved, rigid design of the SnoFoil deflector provides excellent snow-rolling performance, ensuring you have visibility while plowing regardless of the conditions.



### Heavy-Duty Lift Ram

Improve your blade's lifting force with this larger-diameter ram.



### Light Bar Kit

Light up the path in front of your TRAILBLAZER™ UTV plows with this light bar accessory. These LED headlamps help brighten your way.



### Commercial Blade Guide Kits

Commercial blade guides are highly visible fluorescent orange, enhanced with reflective tape, featuring the FISHER® logo, and available in 24" or 36" lengths.



### Steel Deflector

Extend the height of your blade and help keep snow off the windshield without affecting your ability to stack snow.



### Wing Extensions

Expand the carrying capacity of your XV2™ (shown), XtremeV™, HD2™, HDX™ and TRAILBLAZER™ UTV v-plow by adding a pair of genuine FISHER® wing extensions.



### Curb Wear Kits

Constructed of abrasion-resistant material and designed to fit tight to the blade, curb wear kits allow you to plow along curbs without damaging your blade. Kits vary by plow model.



### Snowplow Control Cup Holder Mount

Keep your cabin ready for the next winter storm with the easy-to-install FISHER snowplow control cup holder mount, which effortlessly secures FISHER plow controls or your smartphone\* on a flexible gooseneck mount for optimal, customizable positioning.



### FLEX ARM™ Kit

The quick-release, flexible control mount adjusts to any position and features a magnetic base for easy removal without needing to put mounting holes in your dash.



### Multipurpose Bristles

Replace the snow bristles on the RB-400 rotary broom during the off season with these multipurpose bristles for sweeping debris on a wide variety of surfaces and applications.



### Shoe Kits

Designed to increase the durability and life span of cutting edges and base angles by raising the blade for use on gravel and uneven surfaces. High wear shoe kits available for specific models.



### Back Drag Edges

Made from 1/4" abrasion-resistant steel and custom fit to your blade, back drag edges improve plowing results, providing a clean scrape while back dragging.



### Blade Stop Kit

Designed to transfer extreme impacts throughout the blade's structure and reduce stress on the hydraulic rams. Available for HC (shown), XV2, XtremeV and TRAILBLAZER snowplows.



### Debris Collector

The debris collector easily attaches to the front of your RB-400 rotary broom, so you can sweep up waste and debris quickly, keep it contained and dispose of it properly.



### Plow Parka

Heavy-duty, FISHER branded, nylon cover protects electrical and hydraulic systems from sun fade, oxidation and corrosion.



### Back Drag Edge

Available for the STORM BOXX™ steel edge pusher plow only, the top-mounted, rubber back drag edge allows operators to pull snow away from loading docks, doors and other tight spaces.

Consult your local FISHER dealer or [fisherplows.com](http://fisherplows.com) for accessory compatibility and availability.

\*Control and/or smartphone not included.

# SPECIFICATIONS

## XV2™



PLOW TYPE	V-PLOW	V-PLOW	V-PLOW	V-PLOW
<b>MOLDBOARD OPTIONS</b>	Stainless	Steel/Stainless	Steel/Stainless	Steel/Stainless
<b>BLADE WIDTH</b>	7'6" (2.29 m)	8'6" (2.59 m)	9'6" (2.90 m)	10'6" (3.20 m)
<b>BLADE HEIGHT</b>	At Center: 31" (78.74 cm) At End: 37" (93.98 cm)	At Center: 31" (78.74 cm) At End: 38" (96.52 cm)	At Center: 31" (78.74 cm) At End: 39" (99.06 cm)	At Center: 35" (88.90 cm) At End: 45" (114.30 cm)
<b>BLADE THICKNESS</b>	14 ga (1.98 mm)	14 ga (1.98 mm)	14 ga (1.98 mm)	Steel: 11 ga (3.05 mm) Stainless: 12 ga (2.66 mm)
<b>TRIP SPRINGS</b>	4	4	6	6
<b>RIBS</b>	12	12	12	12
<b>LIFT CYLINDER</b>	1 3/4" x 10" (4.45 cm x 25.40 cm)	1 3/4" x 10" (4.45 cm x 25.40 cm)	1 3/4" x 10" (4.45 cm x 25.40 cm)	1 3/4" x 10" (4.45 cm x 25.40 cm)
<b>ANGLING RAMS</b>	1 3/4" x 11" (4.45 cm x 27.94 cm)	1 3/4" x 11" (4.45 cm x 27.94 cm)	1 3/4" x 11" (4.45 cm x 27.94 cm)	2" x 11" (5.08 cm x 27.94 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	Full Angle: 6'7" (2.01 m) Scoop: 6'4" (1.93 m) Full V: 6'10" (2.08 m)	Full Angle: 7'5" (2.26 m) Scoop: 7'2" (2.18 m) Full V: 7'8" (2.34 m)	Full Angle: 8'6" (2.59 m) Scoop: 8'2" (2.49 m) Full V: 8'7" (2.62 m)	Full Angle: 9'9" (2.97 m) Scoop: 9'7" (2.92 m) Full V: 9'11" (3.02 m)
<b>APPROX. WEIGHT*</b>	914 lb (414.58 kg)	957 lb (434.09 kg)	1044 lb (473.55 kg)	1222 lb (554.29 kg)
<b>CUTTING EDGE</b>	3/8" x 6" (0.95 cm x 15.24 cm) 1/2" x 6" (1.27 cm x 15.24 cm)**	3/8" x 6" (0.95 cm x 15.24 cm) 1/2" x 6" (1.27 cm x 15.24 cm)**	1/2" x 6" (1.27 cm x 15.24 cm)	1/2" x 6" (1.27 cm x 15.24 cm)
<b>MOUNT TYPE</b>	Minute Mount® 2	Minute Mount 2	Minute Mount 2	Minute Mount 2

\*Plus vehicle mount: approx. 60 lb (27.22 kg)  
\*\*Optional accessory

## XTREMEV™



PLOW TYPE	V-PLOW	V-PLOW	V-PLOW
<b>MOLDBOARD OPTIONS</b>	Stainless	Steel/Stainless	Steel/Stainless
<b>BLADE WIDTH</b>	7'6" (2.29 m)	8'6" (2.59 m)	9'6" (2.90 m)
<b>BLADE HEIGHT</b>	At Center: 29" (73.66 cm) At End: 30 3/4" (78.11 cm)	At Center: 29" (73.66 cm) At End: 31" (78.74 cm)	At Center: 31" (78.74 cm) At End: 33" (83.82 cm)
<b>BLADE THICKNESS</b>	14 ga (2.66 mm)	14 ga (2.66 mm)	14 ga (2.66 mm)
<b>TRIP SPRINGS</b>	4	4	6
<b>RIBS</b>	12	12	12
<b>LIFT CYLINDER</b>	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)
<b>ANGLING RAMS</b>	1 3/4" x 11" (4.45 cm x 27.94 cm)	1 3/4" x 11" (4.45 cm x 27.94 cm)	1 3/4" x 11" (4.45 cm x 27.94 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	Full Angle: 6'6" (1.98 m) Scoop: 6'3" (1.91 m) Full V: 6'9" (2.06 m)	Full Angle: 7'5" (2.26 m) Scoop: 7'1" (2.16 m) Full V: 7'7" (2.31 m)	Full Angle: 8'3" (2.51 m) Scoop: 7'11" (2.41 m) Full V: 8'7" (2.62 m)
<b>APPROX. WEIGHT*</b>	821 lb (372.40 kg)	899 lb (407.78 kg)	1013 lb (459.49 kg)
<b>CUTTING EDGE</b>	3/8" x 6" (0.95 cm x 15.24 cm) 1/2" x 6" (1.27 cm x 15.24 cm)**	3/8" x 6" (0.95 cm x 15.24 cm) 1/2" x 6" (1.27 cm x 15.24 cm)**	1/2" x 6" (1.27 cm x 15.24 cm)
<b>MOUNT TYPE</b>	Minute Mount 2	Minute Mount 2	Minute Mount 2

\*Plus vehicle mount: approx. 60 lb (27.22 kg)  
\*\*Optional accessory

## XLS™†



PLOW TYPE	WINGED	WINGED
<b>MOLDBOARD OPTIONS</b>	Steel/Stainless	Steel/Stainless
<b>BLADE WIDTH</b>	Retracted: 8' (2.44 m) Expanded: 10' (3.05 m) Scoop: 8'10" (2.69 m)	Retracted: 8'6" (2.59 m) Expanded: 11' (3.35 m) Scoop: 9'10" (3.00 m)
<b>BLADE HEIGHT</b>	At Center: 31" (78.74 cm) At End: 35" (88.90 cm)	At Center: 31" (78.74 cm) At End: 36" (91.44 cm)
<b>BLADE THICKNESS</b>	14 ga (2.11 mm)	14 ga (2.11 mm)
<b>TRIP SPRINGS</b>	4	4
<b>RIBS</b>	10	10
<b>LIFT CYLINDER</b>	1 3/4" x 10" (4.45 cm x 25.40 cm)	1 3/4" x 10" (4.45 cm x 25.40 cm)
<b>ANGLING RAMS</b>	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	Retracted: 7'2" (2.18 m) Expanded: 9' (2.74 m) Scoop: 7'11" (2.41 m)	Retracted: 7'11" (2.41 m) Expanded: 10'6" (3.20 m) Scoop: 9'6" (2.90 m)
<b>APPROX. WEIGHT*</b>	1107 lb (502.13 kg)	1140 lb (517.10 kg)
<b>BLADE CUTTING EDGE</b>	1/2" x 6" Steel (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)
<b>WING CUTTING EDGE</b>	1 1/2" x 9" Polyurethane (3.81 cm x 22.86 cm)	1 1/2" x 9" Polyurethane (3.81 cm x 22.86 cm)
<b>MOUNT TYPE</b>	Minute Mount® 2	Minute Mount 2

\*Plus vehicle mount: approx. 60 lb (27.22 kg)  
†Snowplows with serial numbers beginning with 180210 and higher.

## HC



## HDX™



PLOW TYPE	STRAIGHT	STRAIGHT	STRAIGHT	STRAIGHT
<b>MOLDBOARD OPTIONS</b>	Steel	Steel	Stainless	Stainless
<b>BLADE WIDTH</b>	9' (2.74 m)	10' (3.05 m)	8' (2.44 m)	9' (2.74 m)
<b>BLADE HEIGHT</b>	34" (86.36 cm)	34" (86.36 cm)	29" (73.66 cm)†	29" (73.66 cm)†
<b>BLADE THICKNESS</b>	11 ga (3.05mm)	11 ga (3.05mm)	14 ga (1.99 mm)	14 ga (1.99 mm)
<b>TRIP SPRINGS</b>	6	6	4	4
<b>RIBS</b>	8	8	8	8
<b>LIFT CYLINDER</b>	1 3/4" x 10" (4.45 cm x 25.40 cm)	1 3/4" x 10" (4.45 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)
<b>ANGLING RAMS</b>	2" x 12 1/2" (5.08 cm x 31.75 cm)	2" x 12 1/2" (5.08 cm x 31.75 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	7'11" (2.41 m)	8'9" (2.67 m)	7'2" (2.19 m)	8'1" (2.46 m)
<b>APPROX. WEIGHT*</b>	1100 lb (498.95 kg)	1125 lb (510.29 kg)	861 lb (390.54 kg)	902 lb (409.14 kg)
<b>CUTTING EDGE</b>	1/2" x 6" (1.27 cm x 15.24 cm)	1/2" x 6" (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)
<b>MOUNT TYPE</b>	Minute Mount 2	Minute Mount 2	Minute Mount 2	Minute Mount 2

\*Plus vehicle mount: approx. 184 lb (83.50 kg) on HC model; 60 lb (27.22 kg) on HDX model  
†HDX blade height shown is for the 55° attack angle. The 65° attack-angle blade height is 28 1/2" and the 75° attack-angle blade height is 27".



## SPECIFICATIONS CONT.

### HD2™

PLOW TYPE	STRAIGHT	STRAIGHT	STRAIGHT	STRAIGHT
MOLDBOARD OPTIONS	Steel	Steel	Steel	Steel
BLADE WIDTH	7'6" (2.29 m)	8' (2.44 m)	8'6" (2.59 m)	9' (2.74 m)
BLADE HEIGHT	29" (73.66 cm)	29" (73.66 cm)	29" (73.66 cm)	29" (73.66 cm)
BLADE THICKNESS	12 ga (2.66 mm)			
TRIP SPRINGS	3	4	4	4
RIBS	10	10	10	10
LIFT CYLINDER	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)
ANGLING RAMS	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)
PLOWING WIDTH (FULL ANGLE)	6'9" (2.05 m)	7'2" (2.19 m)	7'7" (2.32 m)	8'1" (2.46 m)
APPROX. WEIGHT*	684 lb (310.26 kg)	734 lb (332.94 kg)	750 lb (340.20 kg)	770 lb (349.27 kg)
CUTTING EDGE	3/8" x 6" (0.95 cm x 15.24 cm)	1/2" x 6" (1.27 cm x 15.24 cm)	1/2" x 6" (1.27 cm x 15.24 cm)	1/2" x 6" (1.27 cm x 15.24 cm)
MOUNT TYPE	Minute Mount® 2	Minute Mount 2	Minute Mount 2	Minute Mount 2

\*Plus vehicle mount: approx. 60 lb (27.22 kg)



### HS

PLOW TYPE	STRAIGHT	STRAIGHT
MOLDBOARD OPTIONS	Steel	Steel
BLADE WIDTH	6'8" (2.00 m)	7'2" (2.10 m)
BLADE HEIGHT	23 1/2" (59.70 cm)	23 1/2" (59.70 cm)
BLADE THICKNESS	16 ga (1.50 mm)	16 ga (1.50 mm)
TRIP SPRINGS	2	2
RIBS	6	6
PLOWING WIDTH (FULL ANGLE)	5'11" (1.80 m)	6'4 1/2" (1.90 m)
APPROX. WEIGHT*	290 lb (131.54 kg)	297 lb (134.72 kg)
CUTTING EDGE	1/4" x 5" (0.60 cm x 12.70 cm)	1/4" x 5" (0.60 cm x 12.70 cm)

\*Not including vehicle mount



### SD SERIES

PLOW TYPE	STRAIGHT	STRAIGHT	STRAIGHT
MOLDBOARD OPTIONS	Steel	Steel	Steel
BLADE WIDTH	6'9" (2.06 m)	7'6" (2.29 m)	7'6" (2.29 m)
BLADE HEIGHT	26" (66.04 cm)	26" (66.04 cm)	27" (68.58 cm)
BLADE THICKNESS	14 ga (1.98 mm)	14 ga (1.98 mm)	14 ga (1.98 mm)
TRIP SPRINGS	2	2	2
RIBS	8	8	6 + Tube
LIFT CYLINDER	1 1/2" x 6" (3.81 cm x 15.24 cm)	1 1/2" x 6" (3.81 cm x 15.24 cm)	2" x 6 3/4" (5.08 cm x 17.14 cm)
ANGLING RAMS	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 10" (3.81 cm x 25.40 cm)	1 1/2" x 8" (3.81 cm x 20.32 cm)
PLOWING WIDTH (FULL ANGLE)	6'1" (1.85 m)	6'9" (2.06 m)	6'7" (2.01 m)
APPROX. WEIGHT*	472 lb (214.10 kg)	487 lb (220.90 kg)	414 lb (187.80 kg)
CUTTING EDGE	1" x 6" Poly (2.54 cm x 15.24 cm)	1" x 6" Poly (2.54 cm x 15.24 cm) 3/8" x 6" Steel (0.95 cm x 15.24 cm)**	3/8" x 6" Steel (0.95 cm x 15.24 cm)** 1/2" x 6" Steel (1.27 cm x 15.24 cm)** 1" x 6" Steel (2.54 cm x 15.24 cm)**
MOUNT TYPE	Minute Mount 2	Minute Mount 2	Minute Mount 2

\*Plus vehicle mount: approx. 60 lb (27.22 kg)

\*\*Optional accessory



### HT Series™



### STORM BOXX™


PLOW TYPE	UNIVERSAL	UNIVERSAL	BACKHOE	WHEEL LOADER	WHEEL LOADER	WHEEL LOADER
CUTTING EDGE	Steel	Steel	Rubber	Rubber	Rubber	Rubber
MOLDBOARD OPTIONS	Steel	Steel	Steel	Steel	Steel	Steel
BLADE WIDTH	8' (2.44 m)	10' (3.05 m)	12' (3.66 m)	12' (3.66 m)	14' (4.27 m)	16' (4.88 m)
BLADE HEIGHT	32 1/2" (0.83 m)	32 1/2" (0.83 m)	36" (0.91 m)	48" (1.21 m)	48" (1.21 m)	48" (1.21 m)
APPROX. WEIGHT	1012 lb (459.04 kg)	1140 lb (517.10 kg)	1150 lb (521.63 kg)	1680 lb (762.04 kg)	1815 lb (823.27 kg)	1950 lb (884.51 kg)
MACHINE APPLICATION	Skid-Steer, Wheel Loader, Backhoe, Tractor	Skid-Steer, Wheel Loader, Backhoe, Tractor	4WD	1.5 yd (1.37 m)	2 yd (1.82 m)	3 yd (2.74 m)
SNOW CAPACITY	6.4 cu yd (4.89 cu m)	8 cu yd (6.12 cu m)	11 cu yd (10.06 cu m)	15 cu yd (13.72 cu m)	18 cu yd (16.46 cu m)	21 cu yd (19.20 cu m)
MOUNT TYPE	Interchangeable Attachment Plates	Interchangeable Attachment Plates	Quick-Change Attachment System	Quick-Change Attachment System	Quick-Change Attachment System	Quick-Change Attachment System
HORSEPOWER COMPATIBILITY SKID-STEER	45+hp	60+hp				
HORSEPOWER COMPATIBILITY WHEEL LOADER/BACKHOE	60+hp	60+hp				
HORSEPOWER COMPATIBILITY TRACTOR	40+hp	50+hp				



FISHER® FULL-LINE SNOWPLOW + ACCESSORIES

Specifications subject to change without prior notice. Please visit [fisherplows.com](http://fisherplows.com) for the most current specifications.

## SPECIFICATIONS CONT.

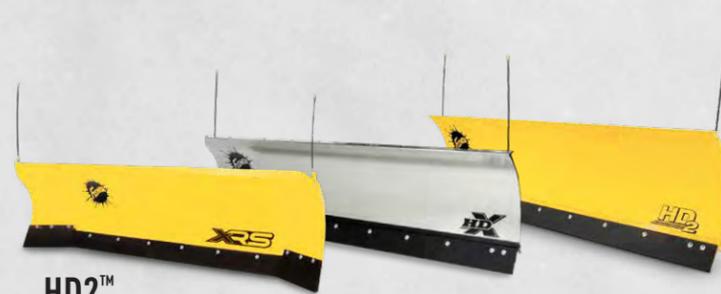

PLOW TYPE	XRS™		HDX™		HD2™		SKID-STEER
	SKID-STEER	SKID-STEER	SKID-STEER	SKID-STEER	SKID-STEER	SKID-STEER	
MOLDBOARD OPTIONS	Steel	Stainless	Steel	Steel	Steel	Steel	Steel
BLADE WIDTH	Scoop: 8'7" (2.60 m) Wings Pinned: 9'8" (2.90 m)	8' (2.44 m)	9' (2.74 m)	7'6" (2.29 m)	8' (2.44 m)	8'6" (2.59 m)	9' (2.74 m)
BLADE HEIGHT	29 1/2" (75.00 cm)	29" (73.66 cm)	29" (73.66 cm)	29" (73.66 cm)	29" (73.66 cm)	29" (73.66 cm)	29" (73.66 cm)
BLADE THICKNESS	12 ga (2.66 mm)	14 ga (1.90 mm)	14 ga (1.90 mm)	12 ga (2.66 mm)			
TRIP SPRINGS	4	4	4	3	4	4	4
RIBS	8	8	8	10	10	10	10
ANGLING RAMS	1 1/2" x 10" (3.81 cm x 25.00 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)	1 1/2" x 12" (3.81 cm x 30.48 cm)
PLOWING WIDTH (FULL ANGLE)	7'10" (2.40 m)	7'2" (2.19 m)	8'1" (2.46 m)	6'9" (2.05 m)	7'2" (2.19 m)	7'7" (2.32 m)	8'1" (2.46 m)
CUTTING EDGE	1/2" x 6" Steel (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)	3/8" x 6" Steel (0.95 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)	1/2" x 6" Steel (1.27 cm x 15.24 cm)
MOUNT TYPE	Universal Skid-Steer Mounting Plate	Universal Skid-Steer Mounting Plate	Universal Skid-Steer Mounting Plate	Universal Skid-Steer Mounting Plate	Universal Skid-Steer Mounting Plate	Universal Skid-Steer Mounting Plate	Universal Skid-Steer Mounting Plate



PLOW TYPE	TRAILBLAZER™	
	UTV - V-PLOW	UTV - STRAIGHT
MOLDBOARD OPTIONS	Steel	Steel
BLADE WIDTH	6' (1.83 m)	6' (1.83 m)
BLADE HEIGHT	At Center: 25 3/4" (65.40 cm) At End: 29 1/4" (74.29 cm)	23 1/2" (59.7 cm)
BLADE THICKNESS	14 ga (1.90 mm)	14 ga (1.90 mm)
TRIP SPRINGS	2	2
RIBS	6	4
LIFT CYLINDER	1 1/2" x 6" (3.81 cm x 15.24 cm)	1 1/2" x 6" (3.81 cm x 15.24 cm)
ANGLING RAMS	1" x 8 3/4" (2.54 cm x 22.23 cm)	1" x 7" (2.50 cm x 18.00 cm)
PLOWING WIDTH** (FULL ANGLE)	Full Angle: 5'0" (1.52 m) Scoop: 4'7" (1.39 m) Full V: 5'0" (1.52 m)	5'4" (1.60 m)
APPROX. WEIGHT*	354 lb (160.58 kg)	261 lb (118.39 kg)
CUTTING EDGE	1/4" x 5" (0.64 cm x 12.70 cm)	1/4" x 5" (0.64 cm x 12.70 cm)
MOUNT TYPE	UTV Mounting System	UTV Mounting System

\*Plus vehicle mount

\*\*TRAILBLAZER UTV V-Plow: For UTVs with a wider wheelbase, width can be adjusted to: 5'6" (1.68 m) full angle, 5'1" (1.55 m) scoop, 5'6" (1.68 m) full V

Specifications subject to change without prior notice. Please visit [fisherplows.com](http://fisherplows.com) for the most current specifications.

## RB-400



PLOW TYPE	WALK-BEHIND ROTARY BROOM
EMPTY WEIGHT	238 lb (108.00 kg)
OVERALL DIMENSIONS	Without Blade: 72" x 40" x 42 1/2" (183.00 cm x 102.00 cm x 108.00 cm) With Blade: 80" x 40" x 42 1/2" (203.00 cm x 102.00 cm x 108.00 cm)
SPEED	Up to 2.7 mph (4.40 km/h)
FORWARD GEARS	3
REVERSE GEARS	1
BRUSH PRESSURE ADJUSTMENT	Yes
ADJUSTABLE HANDLE HEIGHT	7 Positions
ENGINE	Honda® GXV 160 OHV
TIRES	Polar Trec Snow Tires
SNOW BLADE WIDTH	Wide: 40" (102.00 cm) Angled: 37" (94.00 cm)
BRUSH DIAMETER	16" (40.60 cm)
BRUSH WIDTH	40" (102.00 cm)
FUEL CAPACITY	0.5 gal (1.90 L)

## PUSHER SHOVELS



PLOW TYPE	WALK-BEHIND SHOVELS	
MODEL	30"	36"
BLADE DIMENSIONS	30" x 9 1/4" (76.20 cm x 23.50 cm)	36" x 9 1/4" (91.44 cm x 23.50 cm)
OVERALL DIMENSIONS	30" x 54" (76.20 cm x 137.20 cm)	36" x 54" (91.44 cm x 137.20 cm)
WEIGHT	6 lb (2.72 kg)	7 lb (3.18 kg)
MATERIAL	Blade: UHMW-PE Pole: Fiberglass	Blade: UHMW-PE Pole: Fiberglass
HANDLE	Nylon reinforced D-shape	Nylon reinforced D-shape
COLOR	Blade and Handle: Black Pole: Yellow	Blade and Handle: Black Pole: Yellow
APPLICATIONS	Commercial & industrial locations, sidewalks, entryways	
LEVEL OF SNOW	Best in up to 4"-5" (10.16 cm-12.70 cm) of snow	

## WATCH YOUR OPERATION EVOLVE

Built on more than 70 years' experience battling tough New England ice storms, FISHER® spreaders are the ultimate tools in contractor-grade ice control, letting you take on—and take out—new frontiers of icy pavement.

To learn more about the full line of FISHER spreaders, see our spreader brochure or visit [fisherplows.com](http://fisherplows.com).





Fisher Engineering | 50 Gordon Drive | Rockland, Maine 04841

[fisherplows.com](http://fisherplows.com)



Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Fisher Engineering or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow. This product is manufactured under the following US patents: 6,408,547; 6,408,549; 6,442,877; 6,526,677; 6,711,837; 6,928,757; 6,944,978; 7,400,058; 7,430,821; 7,681,334; 7,737,576; 7,797,859; 9,200,418; 9,800,563; CAN patents 2,184,922; 2,229,783; 2,354,257; 2,356,036; 2,358,359; 2,466,195; 2,632,102; 2,639,052 and other patents pending. Fisher Engineering offers a limited warranty on all snowplows and accessories. See separately printed page for this important information. The following are registered(®) and unregistered(™) trademarks of Douglas Dynamics, LLC: EdgeView™ technology, FISHER®, Fish-Stik®, FLEX ARM™, FREEZE GUARD™, HD2™, HDX™, HT Series™, INTENSIFIRE™, Minute Mount®, Minute Mount® 2, POLY-CASTER™, POLY-CASTER™ UTV, QUICK-CASTER™ 300W, SECURITY GUARD™, SnoFoIt®, SPEED-CASTER™ 525 & 900, STEEL-CASTER™, STORM BOXX™, STORM GUARD™, TRAILBLAZER™, XLS™, XRS™, XtremeV™ and XV2™.

© 2019 Douglas Dynamics, LLC  
All rights reserved.

A DIVISION OF FISHER, LLC

Printed in U.S.A.  
Form No. 72838 — AU19