

RM165TM

CUTTING YOUR

- Economically Priced
- Easy Installation
- Suitable for Municipal and Agricultural Markets



RM180TM

BUDGET



- Self-Contained Hydraulic System
- Integrated Safety Break-Away
- Standard Lift Float with Nitrogen Accumulator
- Electronic Joystick or Cable Controls


REAR MOUNT BOOM MOWER

REAR MOUNT BOOM MOWER

RM165™

RM180™

	RM165	RM180
Minimum Horsepower Requirement (PTO hp)	58	65
Minimum Tractor Weight (lbs)	6,615	7,715
Maximum Horizontal Reach (ft/in)	16' 4"	18' 1"
Maximum Vertical Reach (ft/in)	19' 8"	22' 4"
Machine Weight with Flail & Oil (lbs)	2,631	2,701
Output Horsepower (hp)	55	55
Oil Reservoir Capacity (gal)	53	53
Flail Head Option	48"	48"
Rotary Head Option	48" & 60"	48" & 60"
Cutting Capacity	4"	4"
Hitch Design	CAT II	CAT II

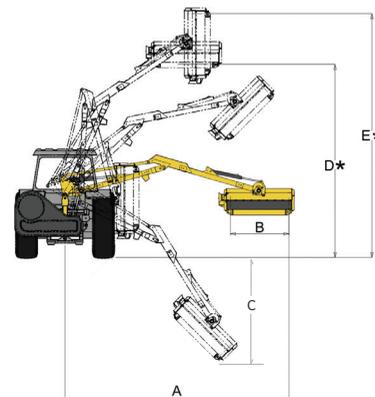

	RM165	RM180
A	16'4"	18'1"
B	48"	48"
C	6'11"	8'2"
D	15'9"	17'5"
E	19'8"	22'4"

This information is intended to be of a general nature only; specifications are subject to change without notice as we continue to improve our products.

© 2019 Alamo Group Inc. Registered trademarks identified are property of Alamo Group Inc.



Always purchase
genuine OEM parts.
1-800-882-5762

A Member of Alamo Group

ALAMO[®] INDUSTRIAL

BUILT SHARPER[®]

1502 East Walnut St. • Seguin, Texas 78155
1-800-882-5762

www.alamo-industrial.com