



Buyers

Romo*Tech*

PROGRESSIVE



Product lines include towing products, toolboxes, truck and trailer hardware, rubber and polymer products, dump body hardware, cables and control systems, hydraulics, pneumatics, driveline components, lights, mudflaps, snowplows, salt spreaders and snow & ice control products.

forging, stamping, laser cutting, CNC machining, robotic welding, rotational molding, powder coating and assembly.



TAILGATE Page 4-9
ELECTRIC DRIVEPage 10-19
GAS DRIVE Page 20
MID-SIZE GAS/ELECTRIC/HYDRAULIC DRIVE (CONVEYOR)Page 21
MUNICIPAL GAS OR HYDRAULIC DRIVE (CONVEYOR) Page 22
MUNICIPAL HYDRAULIC DRIVE (AUGER) Page 23
MUNICIPAL HYDRAULIC DRIVE (CONVEYOR)Page 24-25
LIQUID SPRAY SYSTEMSPage 26-27
UNDER TAILGATEPage 28-29
REPLACEMENT TAILGATE Page 30
WALK BEHINDS Page 31
ACCESSORIES Page 32
A REAL PROPERTY AND A REAL
LOCATE PARTS Page 33

With a Footprint This Big, We Cover as Much Ground as Winter Does

When you need equipment that you can always depend on...

equipment that is guaranteed to be reliable and flexible enough to handle any job, in any situation, no matter what winter might throw at you, you can count on Buyers.

In our 65-plus years, we've grown to be one of the largest manufacturers for mobile equipment and snow removal markets. Our vertically integrated manufacturing facilities ensure the highest quality standards from raw materials to finished products. Make Buyers your single source for spreaders, plows, and pushers.



TGSUV1B Residential Use

SUV, 1/2-ton, 3/4-ton & 1-ton trucks

Spread Material: bagged #1 rock salt **Feed Mechanism:** manual open/close gate w/gravity feed **Power Source:** electric

- Capacity: 4.4 cu. ft.
- Poly hopper, powder-coated steel frame
- Material spread up to 14'
- 1/8 HP, 12 VDC motor with auxiliary plug adapter
- Mounting hardware for 1-1/4" and 2" receiver hitches

TGSUVPROA Light Commercial Use

SUV, 1/2-ton, 3/4-ton & 1-ton trucks

Spread Material: bagged #1 rock salt **Feed Mechanism:** gravity feed w/vertical 12 VDC auger assist **Power Source:** electric

- Capacity: 4.4 cu. ft.
- Poly hopper, powder-coated steel frame
- · Material spread up to 30'
- 1/2 HP, 12 VDC motor with variable speed controller

3011864 - Variable Speed Controller

- · Mounting hardware for 2" receiver hitches
- Prewired for optional vibrator kit (3008241)



3001152 - Auxiliary Plug Adapter with on-off switch for TGSUV1B





TGS02 NEW

SUV, 1/2-ton, 3/4-ton & 1-ton trucks **Spread Material:** ice melt, bagged salt **Feed Mechanism:** horizontal auger feed

Power Source: electric

- Capacity: 3 cu. ft.
- Poly hopper, powder-coated steel frame
- Material spread up to 30'
- 1/3 HP, 12 VDC dual shaft gear motor
- Mounting hardware for 2" receiver hitches
- Prewired for optional vibrator kit (3028195)

SaltDog

"Buyers



THEN.

TGS02



3011864 - Variable Speed Controller Ant

TGS01B

1/2-ton, 3/4-ton & 1-ton trucks

Spread Material: bagged #1 rock salt Feed Mechanism: gravity feed w/vertical 12 VDC auger assist Power Source: electric

- Capacity: 8 cu. ft.
- Poly hopper, powder-coated steel frame
- Material spread up to 30'
- 12 VDC motor
- Prewired for optional vibrator kit (3008241)
- Mount directly to step bumper (standard)

Options:

- Mount using optional receiver mount for a 2" receiver tube (0207005)
- Mount using the optional Wintergate Spreader Mount, allowing full bed access (025000A)
- Optional auger for finer material (3016232)

TGS05B

1/2-ton, 3/4-ton & 1-ton trucks

Spread Material: bagged #1 rock salt

Feed Mechanism: gravity feed w/vertical 12 VDC auger assist Power Source: electric

- Capacity: 10.79 cu. ft.
- · Low-profile poly hopper, powder-coated steel frame
- Material spread up to 30'
- 12 VDC motor
- Prewired for optional vibrator kit (3008241)
- Mount directly to step bumper (standard)

Options:

- Mount using optional receiver mount for a 2" receiver tube (0207005)
- Mount using the optional Wintergate Spreader Mount, allowing full bed access (025000A)
- Optional auger for finer material (3016231)





TGS06

1/2-ton, 3/4-ton & 1-ton trucks Spread Material: bagged #1 rock salt Feed Mechanism: manual open/close gate with gravity feed **Power Source:** electric

- Capacity: 10 cu. ft.
- Poly hopper, powder-coated steel frame
 Material spread up to 30'
- 12 VDC motor housed in a sealed chamber
- Mounts to any 2" hitch receiver (includes universal stake pocket attachment)
- Includes 80 lb. vibrator installed



TGS06

I.T.



3011864 - Variable Speed Controller

www.saltdogg.com



TGS03 patent pending

TAILGATE

1/2-ton and 3/4-ton trucks

Spread Material: bulk salt, salt & sand mix Feed Mechanism: horizontal auger feed mechanism with stainless steel trough

Power Source: electric

- Capacity: 8 cu. ft.
- Poly hopper, powder-coated steel frame
- Material spread up to 30'
- 1/2 HP, 12 VDC dual shaft gear motor
- Requires optional vibrator for salt/sand mix (3020340)
- Mounts on 2" Class 4 receiver with horizontal and vertical adjustments to rest on step bumper






TGS03

Available with Red or Yellow Hopper



TGS03 Horizontal Auger with Stainless Steel Trough

www.saltdogg.com



Prewired for Optional Vibrator Kit Shown Installed (3020340)





一個







TGS07 patent pending

3/4-ton and 1-ton trucks

Spread Material: bulk salt, salt & sand mix **Feed Mechanism:** horizontal auger feed mechanism with stainless steel trough

Power Source: electric

- Capacity: 11 cu. ft.
- Poly hopper, powder-coated steel frame
- · Material spread up to 30'
- 1/2 HP, 12 VDC dual shaft gear motor
- Includes 200 lb. concealed vibrator
- Dual action lid
- Mounts on 2" Class 4 receiver with horizontal and vertical adjustments to rest on step bumper



Standard Vibrator Kit Shown

TGS07



TGS07 Horizontal Auger with Stainless Steel Trough



I TA



Available with Red or Yellow Hopper





3011864 - Variable Speed Controller



SHPE0750 Series

patent pending

1/2-ton, 3/4-ton Trucks & Utility Vehicles

Spread Material: bulk salt, salt & sand mix

Feed Mechanism: 2-1/2" stainless steel auger and trough

Power Source: electric

- Capacity: 0.75 cu. yds.
- Double-wall poly-molded hopper
- Material spread up to 30'
- Two 12 VDC direct drive gear motors (1/2 HP for auger, 1/4 HP for spinner)
- 2-1/2" diameter stainless steel auger and trough
- Spinner assembly can be easily removed for cleaning and storage
- Includes 200 lb. vibrator, top screen, tarp, tie-downs, remote auger bearing grease kit





NEW high flow chute with larger 14" spinner, open trough, and shield that better protects truck from flying salt





SHPE1000 Series

patent pending

2-YEAR WARRANTY on all SHPE Spreaders

1/4-ton, 1/2-ton, 3/4-ton Trucks

Spread Material: bulk salt, salt & sand mix **Feed Mechanism:** 2-1/2" stainless steel auger and trough **Power Source:** electric


- Capacity: 1.00 cu. yds
- Double-wall poly-molded hopper
- · Material spread up to 30'
- Two 12 VDC direct drive gear motors (1/2 HP for auger, 1/4 HP for spinner)
- 2-1/2" diameter stainless steel auger and trough
- Spinner assembly can be easily removed for cleaning and storage
- Includes 200 lb. vibrator, top screen, tarp, tie-downs, remote auger bearing grease kit

SHPE1000



NEW high flow chute with larger 14" spinner, open trough, and shield that better protects truck from flying salt







XL

T DATE NOT



SHPE1500 Series

patent pending

3/4-ton and 1-ton Trucks

Spread Material: bulk salt, salt & sand mix **Feed Mechanism:** 2-1/2" stainless steel auger and trough **Power Source:** electric

- Capacity: 1.5 cu. yds.
- Double-wall poly-molded hopper
- Material spread up to 30'
- Two 12 VDC direct drive gear motors (1/2 HP for auger, 1/4 HP for spinner)
- 2-1/2" diameter stainless steel auger and trough
- · Spinner assembly can be easily removed for cleaning and storage
- Includes 200 lb. vibrator, top screen, tarp, tie-downs, remote auger bearing grease kit

SHPE1500

Not recommended for highway use







NEW high flow chute with larger 14" spinner, open trough, and shield that better protects truck from flying salt



ana





2-YEAR WARRANTY

on all SHPE Spreaders



SHPE2000 Series

patent pending

3/4-ton and 1-ton Trucks

Spread Material: bulk salt, salt & sand mix Feed Mechanism: 2-1/2" stainless steel auger and trough **Power Source:** electric

- Capacity: 2.00 cu. yds
- Double-wall poly-molded hopper
- Material spread up to 30'
- Two 12 VDC direct drive gear motors (1/2 HP for auger, 1/4 HP for spinner)
- 2-1/2" diameter stainless steel auger and trough
- Spinner assembly can be easily removed for cleaning and storage
- Includes 200 lb. vibrator, top screen, tarp, tie-downs, remote auger bearing grease kit

Not recommended for highway use



NEW high flow chute with larger 14" spinner, open trough, and shield that better protects truck from flying salt









SHPE2250 Series

patent pending

1-ton trucks above 10,000 lbs. GVW

Spread Material: bulk salt, salt & sand mix

Feed Mechanism: 5-1/4" carbon steel variable pitch auger, stainless steel trough

Power Source: electric

- Capacity: 2.20 cu. yds. (8')
- Poly-molded hopper
- · Material spread up to 30'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- 5-1/4" FULL LENGTH variable pitch auger and stainless steel trough
- · Spinner assembly can be easily removed for cleaning and storage
- Chute adjusts 12"
- Includes Top screen, stainless steel inverted V, vinyl tarp with tie-down kit, 12 VDC 200 lb. vibrator
- Optional Remote Grease Kit (3022215) available
- Not recommended for highway use





1400701SS

3/4-ton and 1-ton trucks.

Spread Material: bulk salt, salt & sand mix Feed Mechanism: 12" wide all steel pintle chain conveyor **Power Source:** electric

- Capacity: 1.5 cu. yds. (6')
- 304 stainless steel hopper
- · Material spread up to 30'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- Conveyor: 12" wide all-steel pintle chain
- · Feedgate: Lever operated with friction lock for accurate adjustment
- Chute Assembly: Six-fin 14" polymer disc, Chute adjusts 11.5"
- Includes top screen, stainless steel inverted V, hold-down kit

1400601SS

3/4-ton and 1-ton trucks.

Spread Material: bulk salt, salt & sand mix

Feed Mechanism: 12" wide all steel pintle chain conveyor **Power Source:** electric

- Capacity: 2.0 cu. yds. (8')
- 304 stainless steel hopper
- · Material spread up to 30'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- Conveyor: 12" wide all-steel pintle chain
- · Feedgate: Lever operated with friction lock for accurate adjustment
- Chute Assembly: Six-fin 14" polymer disc, Chute adjusts 11.5"
- Includes top screen, stainless steel inverted V, hold-down kit





SHPE3000

13,000 lbs. GVW and above

Spread Material: bulk salt, salt & sand mix **Feed Mechanism:** 6" carbon steel auger, stainless steel trough **Power Source:** electric

- Capacity: 3 cu. yds. (8' 6")
- Double-wall poly-molded hopper
- Material spread up to 30'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- 6" diameter carbon steel auger and stainless steel trough
- Spinner assembly can be easily removed for cleaning and storage
- Chute adjusts 12"
- · Double Doors: Interlocking gutter system and double-door lid channels water away

• Includes top screen, stainless steel inverted V, spreader tie-down kit, hinged poly lids, 12 VDC 400 lb. vibrator Not recommended for highway use



Height Chute



SHPE3000

Auger Drive









SHPE3000CH NEW CHAIN CONVEYOR

13,000 lbs. GVW and above

Spread Material: bulk salt, salt & sand mix **Feed Mechanism:** 12" wide all steel pintle chain conveyor

Power Source: electric

- Capacity: 3 cu. yds. (8' 6").
- Double-wall poly-molded hopper
- · Material spread up to 30'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- 12" wide all steel pintle chain conveyor
- Spinner assembly can be easily removed for cleaning and storage
- Chute adjusts 12"

2-YEAR WARRANTY on all SHPE Spreaders

> Adjustable Height Chute

· Double Doors: Interlocking gutter system and double-door lid channels water away

Chain Conveyor

SHPE3000CH

· Includes top screen, stainless steel inverted V, spreader tie-down kit, hinged poly lids




SHPE4000

Minimum GVW of 17,500 lbs.

Spread Material: bulk salt, salt & sand mix Feed Mechanism: 5-1/2" carbon steel auger, stainless steel trough

Power Source: electric

- Capacity: 4.0 cu. yds. (8' 4")
 Poly-molded hopper with stainless steel frame
 Material spread up to 30'
 Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
 5-1/2" carbon steel auger, stainless steel trough
- Spinner assembly can be easily removed for cleaning and storage
- Includes two top screens, stainless steel inverted V, vinyl tarp with tie-down kit, (2) 12 VDC 400 lb. vibrators Not recommended for highway use







SHPE6000

Minimum GVW of 25,999 lbs.

Spread Material: bulk salt, salt & sand mix

Feed Mechanism: 5-1/2" carbon steel auger, stainless steel trough

Power Source: electric

- Capacity: 6.0 cu. yds. (10' 7")
 Poly-molded hopper with stainless steel frame
 Material spread up to 30'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner).
- 5-1/2" carbon steel auger, stainless steel trough
- Weighs 1,000 lbs. less compared to steel/stainless steel
- Spinner assembly can be easily removed for cleaning and storage
 Includes two top screens, stainless steel inverted V, 12 VDC 900 lb. vibrator
- Optional tarp kit (3021928) available

Not recommended for highway use





V-Box Slide-In

3/4-ton and 1-ton pickup, flatbed or dump truck

Spread Material: bulk salt, bulk sand, salt & sand mix **Feed Mechanism:** 12" wide all steel pintle chain conveyor

Power Source: gasoline

- 304 Stainless Steel
 Capacity/Material: 1400200SS/1400250SS*: 1.5 cu. yds. (6') Stainless Steel, 1400050/1400100*: 2 cu. yds. (8') Carbon Steel 1400050SS/1400100SS*: 2 cu. yds. (8') Stainless Steel, 1400400/1400450*: 2 cu. yds. (8') Polymer 1400300SS/1400350SS*: 2.5 cu. yds. (10') Stainless Steel
- Material spread up to to 30'
- 10.5 HP Briggs & Stratton Intek industrial/commercial gasoline engine with battery
- 12 VDC electric clutch has a three position on-off-on in-cab switch
- Conveyor: 12" wide all steel pintle chain. Heavy-duty drive shaft with heavy-duty 1-1/8" sealed bearings. Idler shaft with sprocket has heavy-duty 1" diameter sealed bearings
- Conveyor Gear Case: Gear ratio is 20:1 with 1" input shaft and 1-1/8 output shaft on tapered roller bearings.
- Feedgate: Lever operated with friction lock for accurate adjustment.
- · Includes top screens, stainless steel adjustable inverted V
- * Indicates extended chute models









2.5 – 3.0 Cubic Yard Mid-Size NEW

Minimum GVW of 13,000 lbs. (see www.saltdogg.com for specs by model number) Spread Material: bulk salt, bulk sand, salt & sand mix Feed Mechanism: 14-1/2" wide conveyor chain with 1/4" crossbars Power Source: gasoline, electric, or hydraulic • Capacity: 2.5 cu. yds. (8'), 2.75 cu. yds. (9'), 3.0 cu. yds. (10'),)

- 304 stainless steel hopper
- Adjustable Feedgate
- Available with 10-1/2 HP gas engine, 2 independent electric motors, or 2 independent hydraulic motors

304SS

1400465SSE

- 14-1/2" wide conveyor chain with 1/4" crossbars
- Spinner chute has two adjustable internal baffles

A DANG

SaltDog

3016934 Controller

for electric powdered spreaders

- 4 Hinged top screens, 1/4" bars
- Inverted V
- · Bolt-on spinner housing
- 14" Spinner disc



Optional Electric-Hydraulic Proportional Spreader Control Kit w/ Garmin® GPS Ground Speed Antenna (HV1030EPG)

0

3010390

Controller

www.saltdogg.com



3.5 – 4.5 Cubic Yard

Minimum GVW of 17,500 lbs. (see www.saltdogg.com for specs by model number) Spread Material: bulk salt, bulk sand, salt & sand mix Feed Mechanism: 14-1/2" wide conveyor chain with 1/4" crossbars **Power Source:** gasoline or hydraulic • Capacity: 3.5 cu. yds. (8'), 4.0 cu. yds. (9'), 4.5 cu. yds. (10')

- 304 stainless steel hopper
- Adjustable Feedgate
- Available with 10-1/2 HP gas engine or 2 independent hydraulic motors
- 14-1/2" wide conveyor chain with 1/4" crossbars
- · Spinner chute has two adjustable internal baffles
- 4 Hinged top screens, 1/4" bars
- Inverted V
- · Bolt-on spinner housing
- 18" Spinner disc



Optional LS1 Liquid Spray System (fits 3 - 4.5 cu. yds.)



Optional Cab Guard (1497051)



Optional Electric-Hydraulic Proportional Spreader Control Kit w/ Garmin® GPS Ground Speed Antenna (HV1030EPG)





7 – 14 Cubic Yard

Minimum GVW 33,000 lbs. (see www.SaltDogg.com for specs by model number)

Spread Material: bulk salt, salt & sand mix

Feed Mechanism: 7" diameter, variable-pitch hard faced auger

Power Source: hydraulic

- Capacity: 7.0 cu. yds. (10'), 8.0 cu. yds. (11'), 9.0 cu. yds. (12'), 10.0 cu. yds. (14')
- 304 Stainless Steel Hopper
- · Material spread up to 45'
- Two independent, direct-drive hydraulic motors
- 7" diameter auger with multi-pitch design
- Adjustable height spinner chute
- 3/8" heavy-duty hinged top screens with 4" peak
- 18" poly spinner disc

Additional sizes/configurations available. Call for quote.





High Torque Auger Motor



2" Auger Bearing



Optional Rubber Side Deflectors Part No. 1492144





5 – 16 Cubic Yard

Minimum GVW Chassis 26,000 lbs., – 66,000 lbs. (see www.SaltDogg.com for specs by model number) Spread Material: bulk salt, bulk sand, salt & sand mix Feed Mechanism: 24" wide conveyor with 3/8" bars Power Source: hydraulic • Capacity: 6 cu. yds. (9'); 7, 8, 9 cu. yds. (10');

- Capacity: 6 cu. yds. (9'); 7, 8, 9 cu. yds. (10');
 10, 11, 13 cu. yds. (12'); 12, 13, 14 cu. yds. (14')
- 304 stainless steel hopper
- Material spread up to 40'
- Adjustable feedgate
- 24" wide conveyor with 3/8" bars
- Two independent direct drive hydraulic motors
- Choice of three gear box ratios: 50:1, 25:1 or 6:1
- Hinged top screens, 3/8" bars on 3" centers
- Inverted V, adjustable
- 2" drive shaft and bearings with 8-tooth sprockets
- 1-1/2" spring loaded idler shaft and bearings with 8-tooth sprockets
- Quick release hinged chute (no tools needed)
- 20" Poly spinner disc

Additional sizes/configurations available. Call for quote.

Shown with optional 8891167 Lightbar and LS4 Liquid Spray System





5 – 16 Cubic Yard Municipal Spreader Options and Accessories



Liquid Spray Systems

Features

- 12 VDC, 3 GPM/45 PSI electric diaphragm pump
- Hydraulic Drive: 4.5 GPM @ 1,750 RPM (150 PSI) with Proportioning Valve, Bronze pump, bronze gears, stainless steel shaft
- 30-gallon polymer reservoir (48"L x 13"W x 14"T)
- 55-gallon polymer reservoir (34"L x 23"W x 26"T)
- 105-gallon polymer reservoir (69"L x 20"W x 25"T)
- 200-gallon polymer reservoir (151"L x 28"W x 33"T)
- Low Pressure empty tank light/buzzer indicator
- In-cab variable speed pump control (electric models)

- Adjustable Hydraulic proportioning valve (hydraulic models)
- Systems include tank, pump, cab controller, hoses, fittings, ball valve, filter, wiring, connectors, stainless steel brackets and tie-downs
- Enclosed pump system for corrosion resistance
- 304 stainless steel mounts

Benefits

- · Provides more efficient salt distribution with fewer applications required
- · Speeds the melting process & works at lower temperatures than salt
- Residual material on the pavement lasts longer
- · Easy to use and maintain



LS1 & LS3 (55 gal. poly reservoir)



LS4 & LS5 (105 gal. poly reservoir)



LS4T (tailgate mount 105 gal. poly reservoir)



LS6 (30 gal. poly reservoir)

LS102H Enclosure Assembly, Hydraulic, 4.5 GPM w/ Cab Controller



LS7 & LS8 (30 gal. poly reservoir)



LS10 (two, 400 gal. poly reservoirs)



LS102H (Hydraulic Enclosure with Proportioning Valve)



WSE1 - Electric Controller



WSE75 - Hydraulic Controller

PART NO.	DESCRIPTION	FITS
LS1	12 VDC, Cab Control, 55 Gal. Poly Reservoir, V-Box Mount	4 cu. yd. +
LS2	12 VDC, Cab Control, Reservoir Excluded, V-Box Mount	3.5 cu. yd. +
LS3	12 VDC, Cab Control, Two 55 Gal. Poly Reservoirs, V-Box Mount	4 cu. yd. +
LS4	12 VDC, Cab Control, 105 Gal. Poly Reservoir, V-Box Mount	3.5 & 6 cu. yd. +
LS4H	Hydraulic, Cab Control, 105 Gal. Poly Reservoir, V-Box Mount	3.5 & 6 cu. yd. +
LS4T	12 VDC, Tailgate Mount, Cab Control, 105 Gal. Poly Reservoir	24" + tall tailgates
LS4TH	Hydraulic, Tailgate Mount, Cab Control, 105 Gal. Poly Reservoir	24" + tall tailgates
LS5	12 VDC, Cab Control, Two 105 Gal. Poly Reservoirs, V-Box Mount	3.5 & 7 cu. yd. +
LS5H	Hydraulic, Cab Control, Two 105 Gal. Poly Reservoirs, V-Box Mount	3.5 & 7 cu. yd. +
LS6	12 VDC, Cab Control, 30 Gal. Poly Reservoir, V-Box Mount	SHPE1500 & SHPE2000 Series
LS6H	Hydraulic, Cab Control, 30 Gal. Poly Reservoir, V-Box Mount	SHPE1500 & SHPE2000 Series
LS7	12 VDC, Cab Control, 30 Gal. Poly Reservoir, V-Box Mount	1400 Series
LS7H	Hydraulic, Cab Control, 30 Gal. Poly Reservoir, V-Box Mount	1400 Series
LS8	12 VDC, Cab Control, Two 30 Gal. Poly Reservoir, V-Box Mount	1400 Series
LS8H	Hydraulic, Cab Control, Two 30 Gal. Poly Reservoir, V-Box Mount	1400 Series
LS10	12 VDC, Cab Control, Two 400 Gal. Poly Reservoir, V-Box Mount	12' – 16' Spreaders
LS10H	Hydraulic, Cab Control, Two 400 Gal. Poly Reservoir, V-Box Mount	12' – 16' Spreaders
LS102	Enclosure Assembly, Electric, 3.0 GPM w/ Cab Controller	<u> </u>



6196335 for 6' beds 6198335 for 8' beds


- 2" hitch mounted liquid spray system
- 335 gallon poly reservoir/bladder for 6' (#6196335) or 8' (#6198335) pick-up bed/flat bed with built-in tie points
- 7 gallons per minute diaphragm pump dispenses up to 50 gallons per lane mile.
- 12 VDC, 28 amps max, rear quick connect harness
- In-cab on/off control, standard. Pressure switch activates pump on demand
- Quick Detach PVC spray bar
- Stainless steel pump cover w/ LED license plate light
- Light weight, reinforced polymer reservoir rolls-up for bulkhead storage.
- Optional: 3/8"x50' hose reel with adjustable hand-held spray nozzle for side walks, bus shelters and hard to reach areas.
- Quick and simple, one-person installation with hitch pin.
- · Lightweight and better visibility than fixed tank systems





335 gal. poly bladder

adjustable spray nozzle - pressure switch activates pump on demand



	PART NO.	DESCRIPTION
	6196335	In-Bed Liquid Spray System for 6ft. Beds
	6198335	In-Bed Liquid Spray System for 8ft. Beds
	6190000	System without Reservoir
	6191000	Optional Hose Reel with Adjustable Spray Nozzle
DumperDogg		
, Buyers 🔊		
	_	
		C.
	TING	
	1/2	
	. An	
11		
pote with Paloe	- A	
	4	



Hydraulic Models

96" wide Dump Bodies

Spread Material: bulk salt, salt & sand mix Feed Mechanism: 6" Auger with 3/8" flighting **Power Source:** hydraulic

- Stainless steel or orange powder-coated carbon steel
- Material spread up to 40'
- Hydraulic power drives auger and spinner
- Standard discharge or left discharge
- 10-gauge trough has 3-point hinged bottom cover for easy access to entire auger assembly and one-person cleanout.
- 6" auger with 3/8" flighting, includes auger screen
- 18" poly spinner
- · Sealed, self-aligning 1-1/4" diameter bearing with grease fitting
- Low-speed, high-torque orbital motors.
- Hydraulic safety lockout system.
- Optional powder coated spill shields (924F0106PR)
- Optional stainless steel spill shields (924F0106SSPR)







Electric Models

96" wide Dump Bodies (for trucks without central hydraulics)


Spread Material: bulk salt, salt & sand mix **Feed Mechanism:** 6" Auger with 3/8" flighting **Power Source:** electric

304 stainless steel

- Material spread up to 25'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- · Standard discharge or center discharge
- 14" poly spinner and stainless steel dump body mounting plates
- 10-gauge trough has 3-point hinged bottom cover for easy access to entire auger assembly and one-person cleanout.
- 6" auger with 3/8" flighting, includes auger screen
- Sealed, self-aligning 1-1/4" diameter bearings with grease fittings
- Optional stainless steel spill shields (924F0106SSPR)

Not recommended for highway use



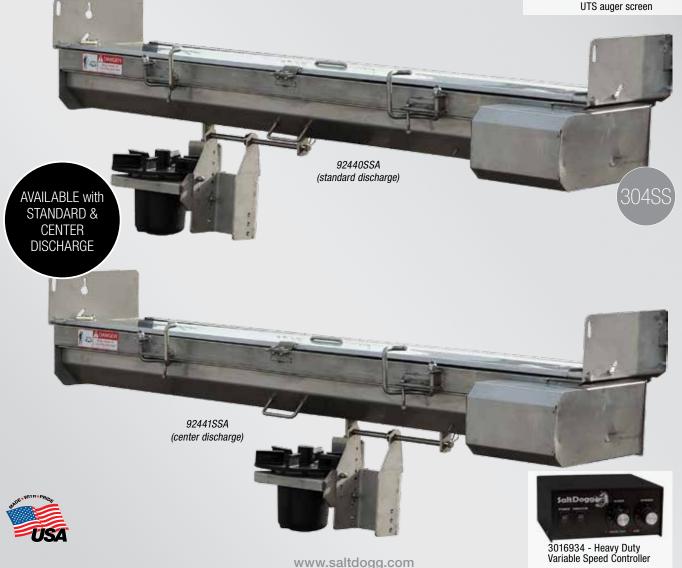



9035000

1-Ton/Super-Duty Dump Bodies

Spread Material: bulk salt, salt & sand mix Feed Mechanism: dual flight auger and breaker bar with mixing tines

Power Source: electric

- 304 stainless steel body
- · Material spread up to 25'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- Auger (5" 0.D. x 2.4" I.D. x 20"L) with mixing tines
- Hinged 14" poly spinner

5535000

All DumperDogg[®] Dump Inserts

Spread Material: bulk salt, salt & sand mix

Feed Mechanism: dual flight auger and breaker bar with mixing tines

Power Source: electric

- 304 stainless steel body
- · Material spread up to 25'
- Two 12 VDC direct drive motors (3/4 HP for auger, 1/2 HP for spinner)
- Auger (5" 0.D. x 2.4" I.D. x 20"L) with mixing tines
- Hinged 14" poly spinner





3016934 - Heavy Duty Variable Speed Controller





WB100B & WB200B

Spread Material: ice melt, bagged salt

Feed Mechanism: flowgate

- 1.5 cubic feet poly hopper, 100 lbs
- 3-flap adjustable poly deflector
- Spread range up to 24 ft.
- · Fully-welded frame
- 13" pneumatic tires
- · Flow regulator with solid control linkage
- · Additional fixed rear deflector
- Hopper screen
- · Plastic rain cover
- · Commercial grade stainless steel gears



WB100B carbon steel frame

SaltDogg

altDo

WB400

Spread Material: ice melt, bagged salt Feed Mechanism: agitator


- 44" wide drop spreader is ideal for sidewalks and areas near sensitive foliage.
- 2.5 cu. ft. poly hopper with 200 lb. capacity.
- · Stainless steel agitator and trough
- 90% assembled.
- Stainless steel main frame, discharge, auger and shaft assembly.
- Nylon bushings for smooth action.
- Large 13" pneumatic tires.
- · Solid control linkage for discharge adjustment, and metal screen to prevent material jamming.
- · Plastic rain cover



Salt Scoop Available part no. 9031110

WB400



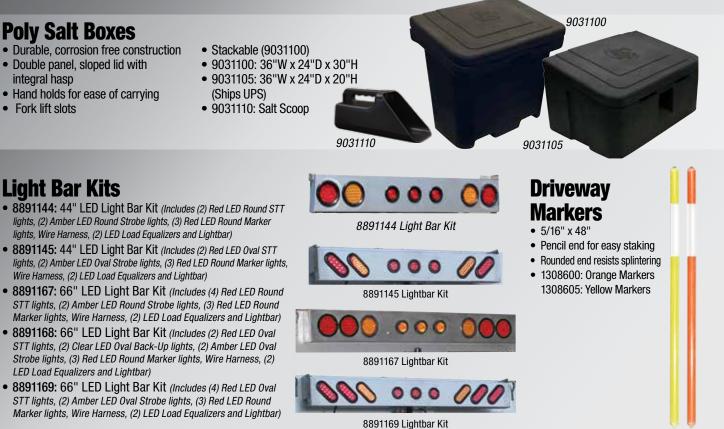

Light Options For Spreaders



1492100 - 5" 12V-24V Clear, 2.92 Amps, 35 Watts



1492110 - 5" 12V-24V, Clear, 54 LED's, .3 Amps, 375 Lumens

1492111 - 5" 12V-24V, Amber, 54 LED's, .3 Amps, 375 Lumens




1492115 - 5" 12V-24V, Clear, 6 LED's, 1.5 Amps, 1350 Lumens

1492116 - 5" 12V-24V, Amber, 6 LED's, 1.5 Amps, 1350 Lumens

ShovelDogg

- Part No. 9001001
- 24" Reinforced mold board •
- Durable, Poly construction for extreme cold
- Lightweight, corrosion free ٠
- Tool-free snap-lock assembly

9001001



Tie Down Kit

- Part No. 3010548
- Heavy-Duty Chain & Turn Buckle Tie Down Kit ٠
- Zinc Plated Hardware •
 - **Powder Coated Brackets**

3010548 for 6-16 cu. yd. Municipal Spreaders

www.saltdogg.com

Dump Body Tailgate Lock Kit

RIGHTEF FD

- Part No. 3008560
- 3" Structural Steel Channel
- 1.25" Pins
- Black Powder Coat Finish






iz		ectric	Hopper Spreader	Wagi Bachi Wasi Fer Yan Ayushatin yi fe Sifa yaqi - 27 Bag 13, Yaqi	pper Spraders () we hager tonate hill of or Tenden hill (ef dig (2.1 hel- a new) (ef dig (2.	menu. T for exam • Select th	altDogg home page, click hen, locate and click the da ple "Electric Hopper Sprea he Spreader Part Number y u are on the product page	esired spread aders" ou are interes
MART &	ana ana an' aona amin' amin' ao amin' am Amin' amin' amin	CAPACITY 1.00.07 pm 1.07 co. 400 3.77 co. 400 4.77 co. 400	Manager and Angel Change Sections of Antipact States Sections & A This Presson Section and Antipact Section 2017 Sections Section Sections (Section 2017 Section Transmo Section Sections 2017 Section 2017 Section Transmo			select "F	Find parts for this Spreader	
26/6103	But not their betters on	12016-040	page beings, performing the SH, for these	SULFERGUES	DAK PAY SAOD SA			
Setting	But has first hardworks	100 million (1990) -	1996 Theory, Nachary, Salahary, Sala	SHPL20003	Bulk Salt, S0/S0 Sa			
BUILDING:	that has place postment re-	10100.000	the last 4 to fair Travia	SHPE2000XRED	Bulk Salt, 50/50 Sa			SHPF2250
INTRODUCT	that last 1912 testimories	1 to 1 to 1 percent	total figure of the Type Transmitt				 Copecity, 2.25 cs. yds. (#). 	3000 S.4.8.9.9
Second Second	ba tal 1010 faithering	1.00-10.008	31 Ter B 1 Ter Tanki	SHEE2000XXEL	Bulk Salt 50/50 Sa		 Bulg-matched bupper 	
Settimute.	But said taria bettland ver-	120.06 446	24 Tee & Charlinsky	mainsmeanan	the state strates of	30 Salt/Sand mix	 Material spread up to 30" 	and the second second
Section 2	But has find had been	100000	University of the Second	SHPE2000YEL	Bulk Sat; 50/50 Sa	14 244 24 14 15	 Two 12-Volt direct drive motors 	and a second
and states	ing has come without the	221.0.10	to be \$1.5 miles	SHPE2250	Bulk Sat, 50/50 Sa		(.75 MP for buger; .1 MP for opinion)	Contraction of the local division of the loc
(artister)	that last 1912 familiers into	1000	tak fan e 'n fan trente	Contraction of the second s			 5.25" PULL LENGTH variable prich caction stand alogie and stainless stand trough 	and the second se
there in the second	being and store hardware	1.00 m eth.	Thirthead & Tax Taxeta	SHPE225GRED	Bulk Salt, 50/50 Sa		 Science assentity can be easily removed 	3
2012/00/01	Bill and Talk Second ton	22016-000	24 Tee & Char Trude	FURTHER DOWN	B. B. C. S. FARS	(show 10,000	for cleaning and storage	· · · ·
1010120121015	The state tarebase rep.	22100.000	tak has a line traine	SHPE2258VEL	Bulk Salt; 50/50 Sa	frank being	 Includes Top poreish, stantists etsel 	
Service .	BA NA TSTI NUTVINE	22114-998	- Tee Trunks Labour 15 201 Res. 2019;1				inverted V, yoy! tarp with be-down sit, 12-	
B4011000	Here and the second second	1221-14	The family beauty \$1,000 dec \$1000				W/R 200 BL VEHINGE	ALL DESCRIPTION OF
PERMIT	the last 1912 testions inc.	Hines.	To the fraction (give with 2010 dest Wester)				Dotione	
264781000	But fail 4000 failtheir im	1.00 to pill.	Children and allows				 Romote Greate Kit - Fill ALL SHPD 	
State and a			The same same of the same same same				 NUMBER OF STREET AND A DESCRIPTION 	
2HTL/USCY WTD/IDI	then had black had been been	address press	The state day infaulty good parameters				gpreaders (B07221h)	

der Coated Steel


STEP 2

· Select and click on a diagram link from the list on the left, for example "Hopper Repair Parts".






"Print" to print the entire list and call, fax or email Customer

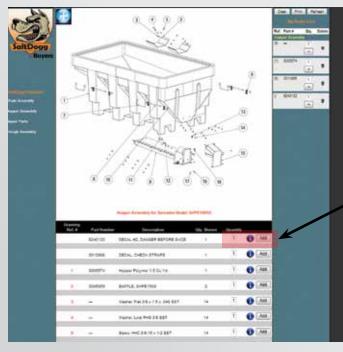

STEP 3

- From the diagram, which labels the parts by number, select the part number needed from the list below the diagram.
- Enter order quantity and click "Add", which adds and displays your part in "My Parts List", located in the column to the right of the diagram. · Repeat until you have added all the parts you need. Then click

Service with your order.



LOCATE REPLACEMENT PARTS the main category, spreader,

in.

Revealed our Instruction Sheet (POP)



PART NUMBER	CAPACITY	overall Height	OVERALL WIDTH	OVERALL Length	Hopper Width	HOPPER Length	FEED MECHANISM
		WA	LK B	EHIN	DS		
WB100B	1.5 cu.ft/ 100 lb.	31.5"	26.5"	40"	22.5"	19"	Gravity Feed
WB200B	1.5 cu.ft/ 100 lb.	31.5"	26.5"	40"	22.5"	19"	Gravity Feed
WB400	2.5 cu.ft/ 200 lb.	35"	44"	45"	18.3"	43.1"	Gravity Feed
	200 101		TAIL	GATE			
TGSUV1B	4.4 cu ft.	40.5"	22.5"	20.5"	21"	19"	manual open/close gate w/gravity feed
TGSUVPROA	4.4 cu. ft.	40.5"	22.5"	20.5"	21"	19"	gravity feed w/ vertical 12 VDC auger assist
TGS02	3.0 cu. ft.	31.5"	30.9"	21.5"	30"	18.3"	Horizontal Auger Feed
TGS01B	8 cu. ft.	45.7"	29.7"	30.3"	26"	26"	gravity feed w/ vertical 12 VDC auger assist
TGS03	8 cu. ft.	45"	38"	30"	38"	28"	Horizontal Auger Feed
TGS03RED	8 cu. ft.	45"	38"	30"	38"	28"	Horizontal Auger Feed
TGS03YEL	8 cu. ft.	45"	38"	30"	38"	28"	Horizontal Auger Feed
TGS05B	10.79 cu ft.	40.1"	54.3"	27.3"	52.25"	23"	gravity feed w/ vertical 12 VDC auger assist
TGS06	10 cu. ft.	40"	63"	27"	52"	26.9"	manual open/close gate w/gravity feed
TGS07	11 cu. ft.	46"	53"	31.5"	51"	26"	Horizontal Auger Feed
TGS07RED	11 cu. ft.	46"	53"	31.5"	51"	26"	Horizontal Auger Feed
TGS07YEL	11 cu. ft.	46"	53"	31.5"	51"	26"	Horizontal Auger Feed
		ELEC	CTRIC	SLID	E IN		
SHPE0750	0.75 cu. yds.	28"	48"	63.2"	48"	53"	2.5" Stainless Stee Auger & Trough
SHPE0750X	0.75 cu. yds.	28"	48"	63.2"	48"	53"	2.5" Stainless Steel Auger & Trough
SHPE1000	1.0 cu. yds	34"	48"	71.5"	48"	68"	2.5" Stainless Stee Auger & Trough
SHPE1000X	1.0 cu. yds	34"	48"	71.5"	48"	68"	2.5" Stainless Steel Auger & Trough
SHPE1500	1.5 cu. yds.	38"	50.5"	99.7"	50.5"	87.3"	2.5" Stainless Steel Auger & Trough
SHPE1500X	1.5 cu. yds.	38"	50.5"	99.7"	50.5"	87.3"	2.5" Stainless Stee Auger & Trough
SHPE1500RED	1.5 cu. yds.	38"	50.5"	99.7"	50.5"	87.3"	2.5" Stainless Stee Auger & Trough
SHPE1500XRED	1.5 cu. yds.	38"	50.5"	99.7"	50.5"	87.3"	2.5" Stainless Stee Auger & Trough
SHPE1500YEL	1.5 cu. yds.	38"	50.5"	99.7"	50.5"	87.3"	2.5" Stainless Steel Auger & Trough
SHPE1500XYEL	1.5 cu. yds.	38"	50.5"	99.7"	50.5"	87.3"	2.5" Stainless Steel Auger & Trough
SHPE2000	2 cu. yds.	40"	47.8"	100"	47.8"	96"	2.5" Stainless Steel Auger & Trough
	2 cu. yds.	40"	47.8"	100"	47.8"	96"	2.5" Stainless Steel

PART NUMBER	CAPACITY	OVERALL HEIGHT	OVERALL WIDTH	OVERALL LENGTH	HOPPER WIDTH	HOPPER LENGTH	FEED MECHANISM
SHPE2000RED	2 cu. yds.	40"	47.8"	100"	47.8"	96"	2.5" Stainless Steel Auger & Trough
SHPE2000XRED	2 cu. yds.	40"	47.8"	100"	47.8"	96"	2.5" Stainless Steel Auger & Trough
SHPE2000YEL	2 cu. yds.	40"	47.8"	100"	47.8"	96"	2.5" Stainless Steel Auger & Trough
SHPE2000XYEL	2 cu. yds.	40"	47.8"	100"	47.8"	96"	2.5" Stainless Steel Auger & Trough
SHPE2250	2.2 cu. yds.	44"	48"	114.2"	48"	98.5"	5.25" Carbon Steel Variable Pitch Auger, Stainless Trough
SHPE2250RED	2.2 cu. yds.	44"	48"	114.2"	48"	98.5"	5.25" Carbon Steel Variable Pitch Auger, Stainless Trough
SHPE2250YEL	2.2 cu. yds.	44"	48"	114.2"	48"	98.5"	5.25" Carbon Steel Variable Pitch Auger, Stainless Trough
1400601SS	2.0 cu. yds.	32.1"	47"	110.8"	47"	96"	12"W Conveyor Chain
1400701SS	1.5 cu. yds.	32.1"	47"	86.8"	47"	72"	12"W Conveyor Chain
SHPE3000	3 cu. yds.	52.7"	49.6"	123.7"	48"	114"	6" Carbon Steel Auger, Stainless Steel Trough
SHPE3000CH	3 cu. yds.	52.7"	49.6"	123.7"	48"	114"	12"W Conveyor Chain
SHPE4000	4 cu. yds.	43.5"	74"	114.8"	74"	99.5"	5.5" Carbon Steel Auger, Stainless Steel Trough
SHPE6000	6 cu. yds.	57"	77"	133.5"	77"	127"	6" Carbon Steel Auger, Stainless Steel Trough
		G	AS SI	IDE I	N		
1400200SS	1.5 cu. yds.	32.1"	47"	91.7"	47"	72"	12"W Conveyor Chain
1400250SS	1.5 cu. yds.	32.1"	47"	91.7"	47"	72"	12"W Conveyor Chain
1400050	2 cu. yds.	32.1"	47"	115.7"	47"	96"	12"W Conveyor Chain
1400100	2 cu. yds.	32.1"	47"	115.7"	47"	96"	12"W Conveyor Chain
1400050SS	2 cu. yds.	32.1"	47"	115.7"	47"	96"	12"W Conveyor Chain
1400100SS	2 cu. yds.	32.1"	47"	115.7"	47"	96"	12"W Conveyor Chain
1400400	2 cu. yds.	35"	47"	115.6"	47"	95.5"	12"W Conveyor Chain
1400450	2 cu. yds.	35"	47"	115.6"	47"	95.5"	12"W Conveyor Chain
1400300SS	2.5 cu. yds.	32.1"	47"	139.7"	47"	120"	12"W Conveyor Chain
1400350SS	2.5 cu. yds.	32.1"	47"	139.7"	47"	120"	12"W Conveyor Chain
2.5	5 – 3.0	CU. \	(D. C	ONVE	YOR	MID-	SIZE
1400455SS	2.5 cu. yds.	38.0"	38.0"	58"	115.9"	96"	14.5"W Conveyor Chain
1400455SSE	2.5 cu. yds.	38.0"	38.0"	58"	116.5"	96"	14.5"W Conveyor Chain
1400455SSH	2.5 cu. yds.	38.0"	38.0"	58"	118.8"	96"	14.5"W Conveyor Chain



-							
PART NUMBER	CAPACITY	OVERALL Height	OVERALL WIDTH	OVERALL Length	HOPPER WIDTH	HOPPER Length	FEED MECHANISM
1400460SS	2.75 cu. yds.	38.0"	38.0"	58"	127.9"	108"	14.5"W Conveyor Chain
1400460SSE	2.75 cu. yds.	38.0"	38.0"	58"	128.5"	108"	14.5"W Conveyor Chain
1400460SSH	2.75 cu. yds.	38.0"	38.0"	58"	130.0"	108"	14.5"W Conveyor Chain
1400465SS	3.0 cu. yds.	38.0"	38.0"	58"	138.9"	120"	14.5"W Conveyor Chain
1400465SSE	3.0 cu. yds.	38.0"	38.0"	58"	140.5"	120"	14.5"W Conveyor Chain
1400465SSH	3.0 cu. yds.	38.0"	38.0"	58"	141.8"	120"	14.5"W Conveyor Chain
3.5	- 4.5 (CU. YI	D. CO	NVEY	OR N	IUNIC	CIPAL
1400475SS	3.5 cu. yds.	45.5"	45.5"	70"	115.9"	96"	14.5"W Conveyor Chain
1400475SSH	3.5 cu. yds.	45.5"	45.5"	70"	118.8"	96"	14.5"W Conveyor Chain
1400500SS	4.0 cu. yds.	45.5"	45.5"	70"	127.9"	108"	14.5"W Conveyor Chain
1400500SSH	4.0 cu. yds.	45.5"	45.5"	70"	130.0"	108"	14.5"W Conveyor Chain
1400550SS	4.5 cu. yds.	45.5"	45.5"	70"	138.9"	120"	14.5"W Conveyor Chain
1400550SSH	4.5 cu. yds.	45.5"	45.5"	70"	141.8"	120"	14.5"W Conveyor Chain
	7-10	CU. YI	D. AU	GER M	MUNIC	CIPAL	
1471056SSH	7 cu. yds.	55.25"	87.7"	157"	84"	120"	7" Hard Surface, Multi Pitch Auger
1471156SSH	8 cu. yds.	55.25"	87.7"	169"	84"	132"	7" Hard Surface, Multi Pitch Auger
1471256SSH	9 cu. yds	55.25"	87.7"	181"	84"	144"	7" Hard Surface, Multi Pitch Auger
1471456SSH	10 cu. Yds	55.25"	87.7"	205"	84"	168"	7" Hard Surface, Multi Pitch Auger
(6-16 CU	. YD.	CON	/EYOF	R MUI	VICIP	AL
1450657SSH	6 cu. yd.	57"	82"	132"	82"	108"	24"W Conveyor, 50:1 Gearbox ratio
1425657SSH	6 cu. yd.	57"	82"	132"	82"	108"	24"W Conveyor, 25:1 Gearbox ratio
1406657SSH	6 cu. yd.	57"	82"	132"	82"	108"	24"W Conveyor, 6:1 Gearbox ratio
1450757SSH	7 cu. yd.	57"	82"	144"	82"	120"	24"W Conveyor, 50:1 Gearbox ratio
1425757SSH	7 cu. yd.	57"	82"	144"	82"	120"	24"W Conveyor, 25:1 Gearbox ratio
1406757SSH	7 cu. yd.	57"	82"	144"	82"	120"	24"W Conveyor, 6:1 Gearbox ratio
1450863SSH	8 cu. yd.	63"	82"	144"	82"	120"	24"W Conveyor, 50:1 Gearbox ratio
1425863SSH	8 cu. yd.	63"	82"	144"	82"	120"	24"W Conveyor, 25:1 Gearbox ratio
1406863SSH	8 cu. yd.	63"	82"	144"	82"	120"	24"W Conveyor, 6:1 Gearbox ratio
1450969SSH	9 cu. yd.	69"	82"	144"	82"	120"	24"W Conveyor, 50:1 Gearbox ratio
1425969SSH	9 cu. yd.	69"	82"	144"	82"	120"	24"W Conveyor, 25:1 Gearbox ratio
1406969SSH	9 cu. yd.	69"	82"	144"	82"	120"	24"W Conveyor, 6:1 Gearbox ratio
1451057SSH	10 cu. yds.	57"	82"	167"	82"	144"	24"W Conveyor, 50:1 Gearbox ratio

PART NUMBER	CAPACITY	OVERALL HEIGHT	OVERALL WIDTH	OVERALL Length	HOPPER WIDTH	HOPPER Length	FEED MECHANISM
1421057SSH	10 cu. yds.	57"	82"	167"	82"	144"	24"W Conveyor, 25:1 Gearbox ratio
1461057SSH	10 cu. yds.	57"	82"	167"	82"	144"	24"W Conveyor, 6:1 Gearbox ratio
1451163SSH	11 cu. yds.	63"	82"	167"	82"	144"	24"W Conveyor, 50:1 Gearbox ratio
1421163SSH	11 cu. yds.	63"	82"	167"	82"	144"	24"W Conveyor, 25:1 Gearbox ratio
1461163SSH	11 cu. yds.	63"	82"	167"	82"	144"	24"W Conveyor, 6:1 Gearbox ratio
1451369SSH	13 cu. yds.	69"	82"	167"	82"	144"	24"W Conveyor, 50:1 Gearbox ratio
1421369SSH	13 cu. yds.	69"	82"	167"	82"	144"	24"W Conveyor, 25:1 Gearbox ratio
1461369SSH	13 cu. yds.	69"	82"	167"	82"	144"	24"W Conveyor, 6:1 Gearbox ratio
1451257SSH	12 cu. yds.	57"	82"	191"	82"	168"	24"W Conveyor, 50:1 Gearbox ratio
1421257SSH	12 cu. yds.	57"	82"	191"	82"	168"	24"W Conveyor, 25:1 Gearbox ratio
1461257SSH	12 cu. yds.	57"	82"	191"	82"	168"	24"W Conveyor, 6:1 Gearbox ratio
1451363SSH	13 cu. yds.	63"	82"	191"	82"	168"	24"W Conveyor, 50:1 Gearbox ratio
1421363SSH	13 cu. yds.	63"	82"	191"	82"	168"	24"W Conveyor, 25:1 Gearbox ratio
1461363SSH	13 cu. yds.	63"	82"	191"	82"	168"	24"W Conveyor, 6:1 Gearbox ratio
1451469SSH	14 cu. yds	69"	82"	191"	82"	168"	24"W Conveyor, 50:1 Gearbox ratio
1421469SSH	14 cu. yds	69"	82"	191"	82"	168"	24"W Conveyor, 25:1 Gearbox ratio
1461469SSH	14 cu. yds	69"	82"	191"	82"	168"	24"W Conveyor, 6:1 Gearbox ratio
		UNI	DER T	AILG/	ATE		
92440SSA	N/A	31.25"/ 34.25"	96"	25"	N/A	N/A	6" Auger w/3/8" flighting
92441SSA	N/A	31.25"/ 34.25"	96"	25"	N/A	N/A	6" Auger w/ 3/8" flighting
92420A	N/A	31.25"/ 34.25"	96"	18"	N/A	N/A	6" Auger w/3/8" flighting
92420SSA	N/A	31.25"/ 34.25"	96"	18"	N/A	N/A	6" Auger w/3/8" flighting
92421SSA	N/A	38.00"/ 41.00"	96"	19"	N/A	N/A	6" Auger w/3/8" flighting
92425SSA	N/A	31.25"/ 34.25"	96"	18"	N/A	N/A	6" Auger w/3/8" flighting
92426SSA	N/A	38.00"/ 41.00"	96"	19"	N/A	N/A	6" Auger w/3/8" flighting
92430A	N/A	31.25"/ 34.25"	96"	18"	N/A	N/A	6" Auger, 3/8" flighting, 5:1 Gearbox ratio
92430SSA	N/A	31.25"/ 34.25"	96"	18"	N/A	N/A	6" Auger, 3/8" flighting, 5:1 Gearbox ratio
	RE	PLAC	EME	NT TA	ILGA [.]	TE	
9035000	N/A	36"	73" - 95"	22"	N/A	N/A	Dual Flight Augers With Mixing Tines
5535000	N/A	36"	73" - 95"	21.5"	N/A	N/A	Dual Flight Augers With Mixing Tines

DESIGN BUILD DISTRIBUTE SUPPORT





Buyers Products Company 9049 Tyler Blvd. Mentor, OH 44060 440.974.8888 Toll-Free Fax 800.841.8003 www.buyersproducts.com

LITSPREADERS Rev B